




Mounting hardware to be ordered separately.

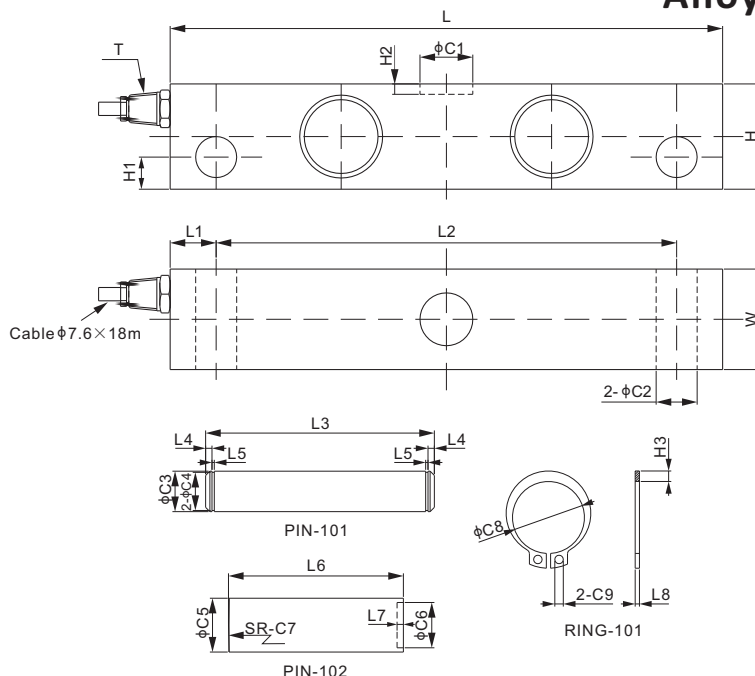

DIMENSIONS

RATED CAPACITY	C1	C2	C3	C4	C5	C6	C7	C8	C9	H	H1	H2	H3	L	L1	L2	L3	L4	L5	L6	L7	L8	W	T
Klb/inches																								
40-50	1.00	0.78	0.75	0.71	1.0	0.84	12.0	0.67	0.08	2.00	0.61	0.20	0.09	10.50	0.87	8.75	4.25	0.12	0.04	3.25	0.12	0.04	1.91	1/4-18 NPT
kg/mm (conversion of above dimensions)																								
18,143.7-22,679.6	25.5	19.8	19.1	18.0	25.4	21.4	304.8	17.0	2.0	50.8	15.5	5.0	2.48	266.7	22.2	222.3	108.0	3.0	1.1	82.6	3.0	1.0	48.5	1/4-18 NPT

SPECIFICATIONS

Full Scale Output	3.0 mV/V $\pm$ 0.25%	Recommended Excitation	10V (15V Maximum)
Zero Balance	$\pm$ 0.02 mV/V	Insulation Resistance	>2 [50V DC] G Ω
Non-linearity	< $\pm$ 0.030%	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Repeatability	< $\pm$ 0.015%	Safe Overload	150% of full scale
Hysteresis Error	< $\pm$ 0.020%	Breaking Overload	300% of full scale
Creep in 30 min.	< $\pm$ 0.020%	Seal Type / IP Rating	Environmentally Sealed / IP67
Input Resistance	700 Ω $\pm$ 10	Cable Color Code	Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare
Output Resistance	700 Ω $\pm$ 5		
Element Material	Alloy Steel, Nickel Plated		

PART NUMBER

Load Cell		
Rated Capacity	Part No.	Weight (kg) Approx.
40Klb.....	102EHEL-40Klb.....	5.4
50Klb.....	102EHEL-50Klb.....	5.4
Mounting Hardware		
Mounting Hardware	Part No.	Weight (kg) Approx.
Mounting Kit*.....	102EHEL-(40-50)Klb-PARTS.....	0.8

* Mounting kit includes: 2 $\times$ PIN-101, 1 $\times$ PIN-102, 4 $\times$ RING-101.

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Coti Global.....	CG-STR
Epelsa.....	STR