


CE RoHS

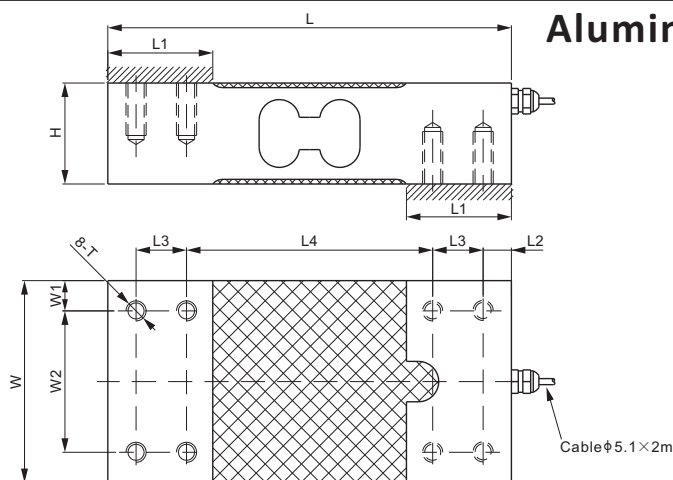

RATED CAPACITY	H	L	L1	L2	L3	L4	W	W1	W2	T
kg/mm										
20-100	25.0	150.0	32.5	6.0	19.0	100.0	45.0	7.5	30.0	M8 Depth15
LE60-LE100; SE150-SE400	40.0	150.0	32.5	6.0	19.0	100.0	45.0	7.5	30.0	M8 Depth20
150-400; SE600	40.0	150.0	38.5	6.0	25.0	88.0	75.0	12.5	50.0	M8 Depth20
500-2,000	50.0	200.0	52.0	14.0	25.0	122.0	100.0	15.0	70.0	M10 Depth23
lb/inches (conversion of above dimensions)										
44.1-220.5	0.98	5.91	1.28	0.24	0.75	3.94	1.77	0.30	1.18	M8 Depth0.59
LE132.3-LE220.5; SE330.7-SE881.8	1.57	5.91	1.28	0.24	0.75	3.94	1.77	0.30	1.18	M8 Depth0.79
330.7-881.8; SE1,322.8	1.57	5.91	1.52	0.24	0.98	3.46	2.95	0.49	1.97	M8 Depth0.79
1,102.3-4,409.2	1.97	7.87	2.05	0.55	0.98	4.80	3.94	0.59	2.76	M10 Depth0.91

SPECIFICATIONS			
Full Scale Output	2.0 mV/V $\pm$ 10%	Reference Max. Platform Size	Capacity: 20-100kg: 460 $\times$ 600 mm
Zero Balance	$\pm$ 0.02 mV/V		Capacity: 150-400kg: 600 $\times$ 600 mm
Non-linearity	$\leq \pm$ 0.017%		Capacity: 500kg-2t: 900 $\times$ 900 mm
Repeatability	$\leq \pm$ 0.017%	Insulation Resistance	>2 [50V DC] G Ω
Hysteresis Error	$\leq \pm$ 0.017%	Nominal Temperature Range	-10 $^{\circ}$ C to 40 $^{\circ}$ C / 14 $^{\circ}$ F to 104 $^{\circ}$ F
Creep in 30 min.	$\leq \pm$ 0.017%	Safe Overload	150% of full scale
Input Resistance	415 Ω $\pm$ 15	Breaking Overload	300% of full scale
Output Resistance	350 Ω $\pm$ 3	Seal Type / IP Rating	Environmentally Sealed / IP66
Element Material	Aluminum	Cable Color Code	Exc+ Red Exc- Black
Recommended Excitation	10V (15V Maximum)		Sig+ Green Sig- White Shield Bare

PART NUMBER		
Rated Capacity	Part No.	Weight (kg) Approx.
20kg.....	108JA-20kg.....	0.4
50kg.....	108JA-50kg.....	0.5
60kg.....	108JA-60kg.....	0.5
LE60kg.....	108JA-LE60kg.....	0.7
75kg.....	108JA-75kg.....	0.5
LE75kg.....	108JA-LE75kg.....	0.7
100kg.....	108JA-100kg.....	0.5
LE100kg.....	108JA-LE100kg.....	0.7
SE150kg.....	108JA-SE150kg.....	0.7
150kg.....	108JA-150kg.....	1.1
SE200kg.....	108JA-SE200kg.....	0.7
200kg.....	108JA-200kg.....	1.1
SE300kg.....	108JA-SE300kg.....	0.7
300kg.....	108JA-300kg.....	1.1
SE400kg.....	108JA-SE400kg.....	0.7
400kg.....	108JA-400kg.....	1.1
500kg.....	108JA-500kg.....	2.5
SE600kg.....	108JA-SE600kg.....	1.1
750kg.....	108JA-750kg.....	2.5
1t.....	108JA-1t.....	2.5
1.5t.....	108JA-1.5t.....	2.5
2t.....	108JA-2t.....	2.6

INTERCHANGEABLE PRODUCTS	
Model	Model
108JA-LE60kg.....	108LA-60kg
108JA-LE100kg.....	108LA-100kg
108JA-SE150kg.....	108LA-150kg
108JA-SE200kg.....	108LA-200kg
108JA-SE300kg.....	108LA-300kg
108JA-50kg.....	651JS-50kg*
108JA-75kg.....	651JS-75kg*
108JA-LE75kg.....	651JS-75kg*
108JA-SE200kg.....	651JS-200kg*
108JA-SE400kg.....	651JS-400kg*

* Most dimensions are the same, except overall height (H on the drawing): 651JS all capacities at 49mm(1.9inch), while 108JA-50kg & 108JA-75kg 25mm(0.98inch), 108JA-LE75kg, 108JA-SE200kg, 108JA-SE400kg 40mm(1.57inch).



20kg-500kg: NTEP 1:5 000 Class III, Single Cell;
SE600kg-2t: NTEP 1:4 000 Class III, Single Cell



20kg: OIML MAA C4, Y=15 000;
50kg-500kg: OIML MAA C5, Y=12 300;
SE600kg-2t: OIML MAA C4, Y=4 000