


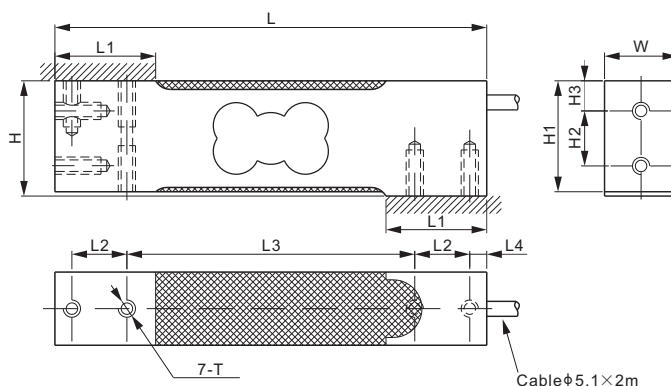

CE RoHS

DIMENSIONS

RATED CAPACITY	H	H1	H2	H3	L	L1	L2	L3	L4	W	T
108TA, 108TA-A1, 108TA-A2:											
kg/mm											
5-200	40.0	38.5	19.1	10.5	150.0	35.0	19.1	100.0	5.9	25.4	M6 Depth16
lb/inches (conversion of above dimensions)											
11.0-440.92	1.57	1.52	0.75	0.41	5.91	1.38	0.75	3.94	0.23	1.00	M6 Depth0.6
108TAUN, 108TAUN-A1, 108TAUN-A2:											
kg/mm											
5-200	40.0	38.5	19.1	10.5	150.0	35.0	19.1	100.0	5.9	25.4	1/4-20UNC-2B Depth16
lb/inches (conversion of above dimensions)											
11.0-440.92	1.57	1.52	0.75	0.41	5.91	1.38	0.75	3.94	0.23	1.00	1/4-20UNC-2B Depth0.6

SPECIFICATIONS

Maximum Capacity (E _{max})	kg	5 / 7 / 10 / 15 / 20 / 30 / 50 / 75 / 100 / 150 / 200		
Model		108TA/108TAUN	108TA-A1/108TAUN-A1	108TA-A2/108TAUN-A2
Accuracy class according to NTEP Class III S		1:3000	1:4000	1:5000
Maximum number or verification interval (n _{max})		3000	4000	5000
Y		12300		
Temperature effect on zero balance	%*Cn/K	±0.00114		
Temperature effect on sensitivity	%*Cn/K	±0.0012	±0.000875	±0.0007
Non-linearity	%*Cn	±0.017	±0.010	±0.0075
Hysteresis Error	%*Cn	±0.017	±0.012	±0.010
Creep error (30min)/DR	%*Cn	±0.017	±0.012	±0.010
Full Scale Output (C _n)	mV/V	2 ± 10%		
Zero Balance	mV/V	±0.02		
Recommended voltage	V	10 (15 Maximum)		
Input Resistance	Ω	415 ± 15		
Output Resistance	Ω	350 ± 3		
Insulation resistance [50V DC]	GΩ	>2		
Safe overload [Elim]	%*E _{max}	150		
Breaking overload	%*E _{max}	300		
Safe side load	%*E _{max}	100		
Nominal temperature range	°C / °F	-10 to 50 / 14 to 122		
Element Material		Aluminum		
Seal type / IP rating		Environmentally Sealed / IP66		
Cable color code		Exc+ Red Exc- Black Sig+ Green Sig- White		

PART NUMBER

Metric thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TA-5kg.....	0.4
7kg.....	108TA-7kg.....	0.4
10kg.....	108TA-10kg.....	0.4
15kg.....	108TA-15kg.....	0.4
20kg.....	108TA-20kg.....	0.4
30kg.....	108TA-30kg.....	0.4
50kg.....	108TA-50kg.....	0.4
75kg.....	108TA-75kg.....	0.4
100kg.....	108TA-100kg.....	0.4
150kg.....	108TA-150kg.....	0.4
200kg.....	108TA-200kg.....	0.4

Metric thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TA-5kg-A1.....	0.4
7kg.....	108TA-7kg-A1.....	0.4
10kg.....	108TA-10kg-A1.....	0.4
15kg.....	108TA-15kg-A1.....	0.4
20kg.....	108TA-20kg-A1.....	0.4
30kg.....	108TA-30kg-A1.....	0.4
50kg.....	108TA-50kg-A1.....	0.4
75kg.....	108TA-75kg-A1.....	0.4
100kg.....	108TA-100kg-A1.....	0.4
150kg.....	108TA-150kg-A1.....	0.4
200kg.....	108TA-200kg-A1.....	0.4

Metric thread, 1:5000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TA-5kg-A2.....	0.4
7kg.....	108TA-7kg-A2.....	0.4
10kg.....	108TA-10kg-A2.....	0.4
15kg.....	108TA-15kg-A2.....	0.4
20kg.....	108TA-20kg-A2.....	0.4
30kg.....	108TA-30kg-A2.....	0.4
50kg.....	108TA-50kg-A2.....	0.4
75kg.....	108TA-75kg-A2.....	0.4
100kg.....	108TA-100kg-A2.....	0.4
150kg.....	108TA-150kg-A2.....	0.4
200kg.....	108TA-200kg-A2.....	0.4

INTERCHANGEABLE PRODUCTS

Manufacturer Model

108TA, 108TA-A1, 108TA-A2

Flintec.....	PC42 (20-150kg)*
Vishay Revere Transducers.....	642C
Vishay Tedeo-Huntleigh.....	1042(metric threads)

108TAUN, 108TAUN-A1, 108TAUN-A2

Cardinal.....	TSP
Coti Global.....	CG-42
HBM.....	SP4
Rice Lake.....	RL1042
Rice Lake.....	RLSP4
Vishay Revere Transducers.....	642
Vishay Tedeo-Huntleigh.....	1042(imperial threads)

* Flintec PC42 has a M8 mounting hole

PART NUMBER

Metric thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TAUN-5kg.....	0.4
7kg.....	108TAUN-7kg.....	0.4
10kg.....	108TAUN-10kg.....	0.4
15kg.....	108TAUN-15kg.....	0.4
20kg.....	108TAUN-20kg.....	0.4
30kg.....	108TAUN-30kg.....	0.4
50kg.....	108TAUN-50kg.....	0.4
75kg.....	108TAUN-75kg.....	0.4
100kg.....	108TAUN-100kg.....	0.4
150kg.....	108TAUN-150kg.....	0.4
200kg.....	108TAUN-200kg.....	0.4

Metric thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TAUN-5kg-A1.....	0.4
7kg.....	108TAUN-7kg-A1.....	0.4
10kg.....	108TAUN-10kg-A1.....	0.4
15kg.....	108TAUN-15kg-A1.....	0.4
20kg.....	108TAUN-20kg-A1.....	0.4
30kg.....	108TAUN-30kg-A1.....	0.4
50kg.....	108TAUN-50kg-A1.....	0.4
75kg.....	108TAUN-75kg-A1.....	0.4
100kg.....	108TAUN-100kg-A1.....	0.4
150kg.....	108TAUN-150kg-A1.....	0.4
200kg.....	108TAUN-200kg-A1.....	0.4

Metric thread, 1:5000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
5kg.....	108TAUN-5kg-A2.....	0.4
7kg.....	108TAUN-7kg-A2.....	0.4
10kg.....	108TAUN-10kg-A2.....	0.4
15kg.....	108TAUN-15kg-A2.....	0.4
20kg.....	108TAUN-20kg-A2.....	0.4
30kg.....	108TAUN-30kg-A2.....	0.4
50kg.....	108TAUN-50kg-A2.....	0.4
75kg.....	108TAUN-75kg-A2.....	0.4
100kg.....	108TAUN-100kg-A2.....	0.4
150kg.....	108TAUN-150kg-A2.....	0.4
200kg.....	108TAUN-200kg-A2.....	0.4