


OCSB Series

FEATURES

- Fast resolution switching
- 38mm 5 digits LED display
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

OPTION

- Wireless Scoreboard
- LCD display version, model OCSB4

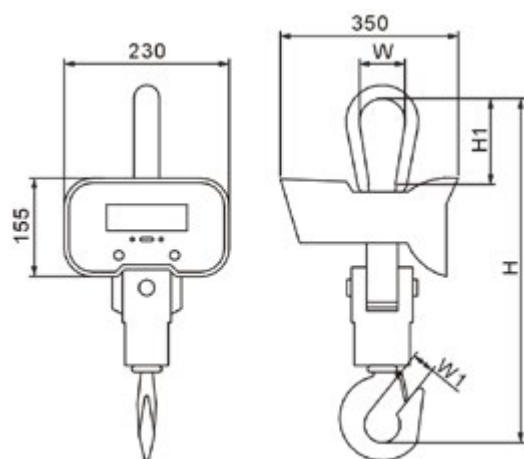

Model	OCSB3
Type	General
Accuracy Class	OIML III
Enclosure	Die-casting aluminum
Display	38mm LED
Capacity Available	2 / 4 / 6 / 10 Kilb
Battery Life	100 Hours
High Quality Load Receptor	Alloy Steel
Shackle	H.D. Fixed
Hook	H.D. Rotatable
High Capacity Rechargeable Battery	Yes 6V/10Ah
Infrared Remote Control	Yes

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
2Klb	1 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
4Klb	2 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
6Klb	2 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
10Klb	5 lb	490mm / 19.29"	115mm / 4.53"	85mm / 3.35"	40mm / 1.57"	17kg / 37.5 lb	19kg / 40.8 lb

*Dimensions and specifications are subject to change without notice.