




OCSC Series

FEATURES

- Fast resolution switching
- Supplied with 2 rechargeable batteries
- 38mm 5 digits LED display
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

OPTION

- Wireless Scoreboard
- LCD display version, model OCSC4

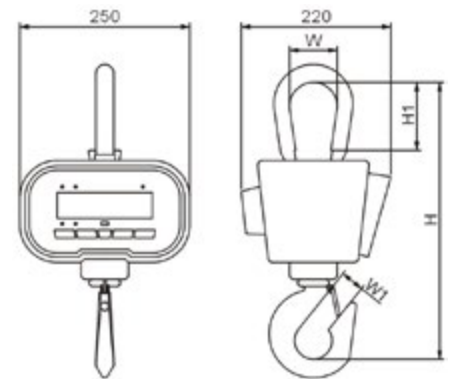

Model	OCSC3
Type	Convenience
Accuracy Class	OIML III
Enclosure	Die-casting aluminum
Display	38mm LED
Capacity Available	2 / 4 / 6 / 10 Klb
Battery Life	80 Hours (with 2 batteries)
High Quality Load Receptor	Alloy Steel
Shackle	H.D. Fixed
Hook	H.D. Rotatable
High Capacity Rechargeable Battery	Yes (Easy to exchange) 6V/3.2Ahx2
Infrared Remote Control	Yes

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
2Klb	1 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
4Klb	2 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
6Klb	2 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
10Klb	5 lb	480mm / 18.90"	115mm / 4.53"	85mm / 3.35"	40mm / 1.57"	15kg / 33.1 lb	18kg / 39.7 lb

*Dimensions and specifications are subject to change without notice.