


563YSM2

Stainless Steel

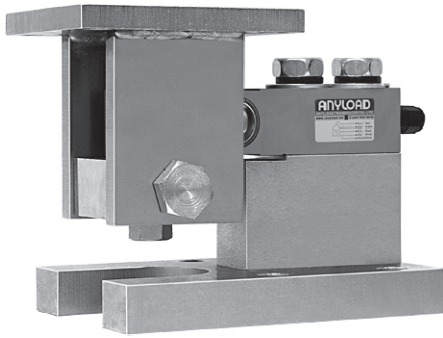


Features:

- Assembles: 563YS single ended beam load cell
- Capacities: 500lb-SE5Klb
- Center pivoted and self-checking
- Tension load applied to the load cell is converted to compression load application for the weigh module

Load Cell Certifications:



Load Cell Not Included.

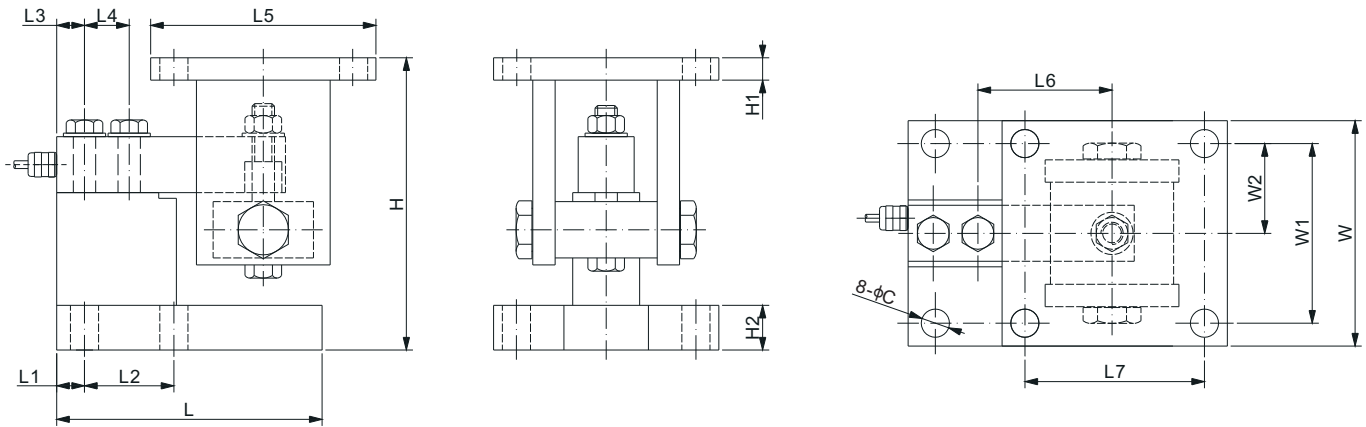

DIMENSIONS

LOAD CELL CAPACITY	C	H _{Min/Max}	H1	H2	L	L1	L2	L3	L4	L5	L6	L7	W	W1	W2
500-SE5,000	0.63	6.50/6.69	0.50	1.00	5.98	0.67	2.00	0.62	1.00	5.04	3.00	4.02	5.04	4.02	2.01

SE refers to small envelope

PART NUMBER

Load Cell Capacity	Material	Part No.	Shipping Weight (kg) Approx.
500lb-SE5Klb	304 Stainless Steel	563YSM2-(0.5-SE5)Klb	9.1
	2Cr13 Stainless Steel	563YSM2-(0.5-SE5)Klb-YZ	9.1

WEIGH MODULES