



## OCSC Series


### FEATURES

- Fast resolution switching
- Supplied with 2 rechargeable batteries
- 38mm 5 digits LED display for OCSC3
- 30mm 5 digits LCD display for OCSC4
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

Model	OCSC3	OCSC4
Type	Convenience	Convenience
Accuracy Class	OIML III	OIML III
Enclosure	Die-casting Aluminum	Die-casting Aluminum
Display	38mm LED	30mm LCD w/Backlight
Capacity Available	2 / 4 / 6 / 10 Klb	2 / 4 / 6 / 10 Klb
Battery Life	80 Hours ( with 2 batteries)	80 Hours ( with 2 batteries)
High Quality Load Receptor	Alloy Steel	Alloy Steel
Shackle	H.D. Fixed	H.D. Fixed
Hook	H.D. Rotatable	H.D. Rotatable
High Capacity Rechargeable Battery	Yes (Easy to exchange) 6V/3.2Ahx2	Yes (Easy to exchange) 6V/3.2Ahx2
Infrared Remote Control	Yes	Yes

### OPTION

- Wireless Scoreboard

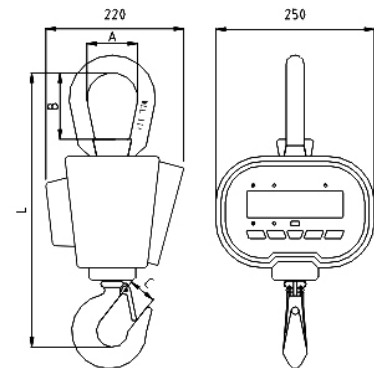

Rated Capacity	Division	A	B	C	L	N.W.	G.W.
1t / 2Klb	0.5kg / 1 lb	70mm / 2.76"	100mm / 3.94"	35mm / 1.38"	420mm / 16.54"	11.5kg / 24.4 lb	14kg / 31.0 lb
2t / 4Klb	1kg / 2 lb	70mm / 2.76"	100mm / 3.94"	35mm / 1.38"	420mm / 16.54"	11.5kg / 24.4 lb	14kg / 31.0 lb
3t / 6Klb	1kg / 2 lb	70mm / 2.76"	100mm / 3.94"	35mm / 1.38"	420mm / 16.54"	11.5kg / 24.4 lb	14kg / 31.0 lb
5t / 10Klb	2kg / 5 lb	85mm / 3.35"	115mm / 4.53"	40mm / 1.57"	480mm / 18.90"	15kg / 33.1 lb	18kg / 39.7 lb

\*Dimensions and specifications are subject to change without notice.