
651PS

Stainless Steel



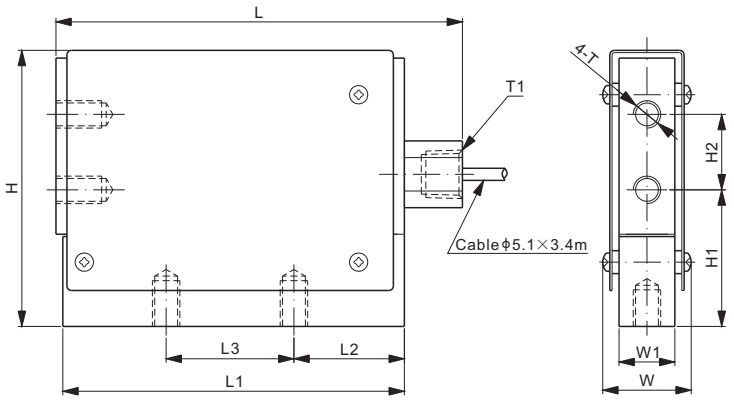

CE RoHS

DIMENSIONS

RATED CAPACITY	H	H1	H2	L	L1	L2	L3	W	W1	T	T1
lb/inches											
50	4.75	2.35	1.30	7.00	5.88	1.90	2.20	1.52	0.96	M12 Depth20	1/2-14-NPT
kg/mm (conversion of above dimensions)											
22.68	120.7	59.7	33.0	177.8	149.4	48.3	55.9	38.7	24.4	M12 Depth0.79	1/2-14-NPT

SPECIFICATIONS

Full Scale Output	2.000 - 2.002 mV/V	**Recommended Excitation**	10V (15V Maximum)
Zero Balance	±0.02 mV/V	**Reference Max.Platform Size**	400×400 mm
Non-linearity	<±0.02%	**Insulation Resistance**	>2［50V DC］GΩ
Repeatability	<±0.02%	**Compensated Temperature Range**	-10°C to 50°C / 14°F to 122°F
Hysteresis Error	<±0.02%	**Safe Overload**	150% of full scale
Creep in 30 min.	<±0.03%	**Breaking Overload**	300% of full scale
Input Resistance	450Ω ±100	**Seal Type / IP Rating**	Environmentally Sealed / IP66
Output Resistance	350Ω ±3	**Cable Color Code**	Exc+ Red Exc- Black
Element Material	17-4PH Stainless Steel		Sig+ Green Sig- White Shield Bare

PART NUMBER

Rated Capacity	Part No.	Shipping Weight (kg) Approx.
50lb	651PS-50lb	2.9

SINGLE POINTS

www.anyload.com
© 2018 ANYLOAD V1 dimensions and specifications subject to change without notice