



Aluminum



Capacity: 3-75kg

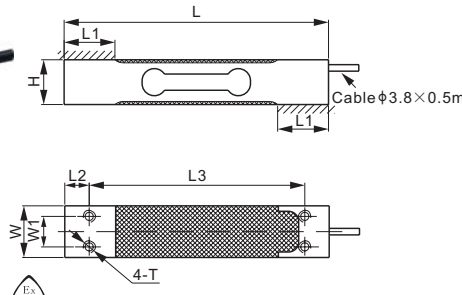

Capacity: 100kg; 150kg

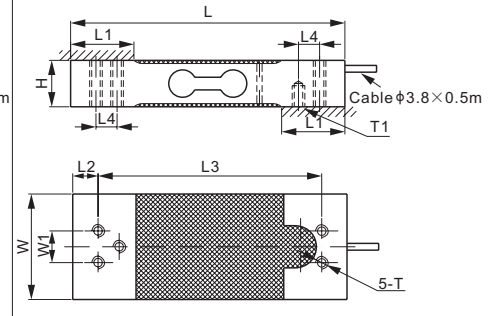

DIMENSIONS

RATED CAPACITY	H	L	L1	L2	L3	L4	W	W1	T	T1
kg/mm										
3-30	22.0	130.0	25.0	12.0	106.0	-	25.4	15.0	M6	-
35	22.0	130.0	25.0	12.0	106.0	-	30.0	15.0	M6	-
40	22.0	130.0	25.0	12.0	106.0	-	38.5	15.0	M6	-
50; 60; 75	22.0	130.0	30.0	12.0	106.0	-	38.5	15.0	M6	-
100; 150	22.0	130.0	30.0	12.0	106.0	10.0	50.0	15.0	M6	M6 Depth10
lb/inches (conversion of above dimensions)										
6.61-66.14	0.87	5.12	0.98	0.47	4.17	-	1.00	0.59	M6	-
77.16	0.87	5.12	0.98	0.47	4.17	-	1.18	0.59	M6	-
88.18	0.87	5.12	0.98	0.47	4.17	-	1.52	0.59	M6	-
110.23; 132.28; 165.35	0.87	5.12	1.18	0.47	4.17	-	1.52	0.59	M6	-
220.46; 330.69	0.87	5.12	1.18	0.47	4.17	0.39	1.97	0.59	M6	M6 Depth0.39

SPECIFICATIONS

Full Scale Output	2.0 mV/V $\pm$ 10%	Recommended Excitation	10V (15V Maximum)
Zero Balance	$\pm$ 0.02 mV/V	Reference Max. Platform Size	400x400 mm
Non-linearity	$< \pm 0.017\%$	Insulation Resistance	$> 2 [50V DC] G\Omega$
Repeatability	$< \pm 0.017\%$	Nominal Temperature Range	-10°C to 40°C / 14°F to 104°F
Hysteresis Error	$< \pm 0.017\%$	Safe Overload	150% of full scale
Creep in 30 min.	$< \pm 0.023\%$	Breaking Overload	300% of full scale
Input Resistance	415 $\Omega \pm 15$	Seal Type / IP Rating	Environmentally Sealed / IP66
Output Resistance	350 $\Omega \pm 3$	Cable Color Code	Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare
Element Material	Aluminum, Clear Anodized		

PART NUMBER*

Rated Capacity	Part No.	Weight Approx. (kg)
3kg.....	108BA-3kg.....	0.2
6kg.....	108BA-6kg.....	0.2
6kg**.....	108BA-03-6kg.....	0.2
7kg.....	108BA-7kg.....	0.2
10kg.....	108BA-10kg.....	0.2
15kg.....	108BA-15kg.....	0.2
20kg.....	108BA-20kg.....	0.2
30kg.....	108BA-30kg.....	0.2
35kg.....	108BA-35kg.....	0.2
40kg (W=38.5mm).....	108BA-40kg.....	0.2
40kg (W=30mm).....	108BA-W1-40kg.....	0.2
50kg.....	108BA-50kg.....	0.26
60kg.....	108BA-60kg.....	0.26
75kg.....	108BA-75kg.....	0.26
100kg.....	108BA-100kg.....	0.35
150kg.....	108BA-150kg.....	0.35

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

** W=30.0mm, side cable exit

INTERCHANGEABLE REFERENCE

Brand	Model
Mettler-Toledo	MT1022
Flintec.....	PC22*
HBM.....	PW6C**
HBM.....	PW6K
Rice Lake.....	RL1521A
Vishay Celtron	LPS ME 6-35kg
Vishay TedeA-Huntleigh.....	1022

* PC22 : 6-wire cable, the shielding wire connected to the sensor body, width of 20kg and 30kg is 30mm.

** Full scale output of PW6C: 2.2 $\pm$ 0.2% mV/V

NTEP 1:5 000 Class III, Single Cell



6kg-40kg: OIML MAA C7.5, Y=20 000;

50kg-150kg: OIML MAA C6, Y=29 000

For further available P/N's & specifications per NTEP/OIML classes, please contact us.

AVAILABLE OPTIONS

- 1m cable
- 3m cable
- Stainless steel version 108BS