


563RS

Stainless Steel

ANYLOAD

SINGLE ENDED BEAMS

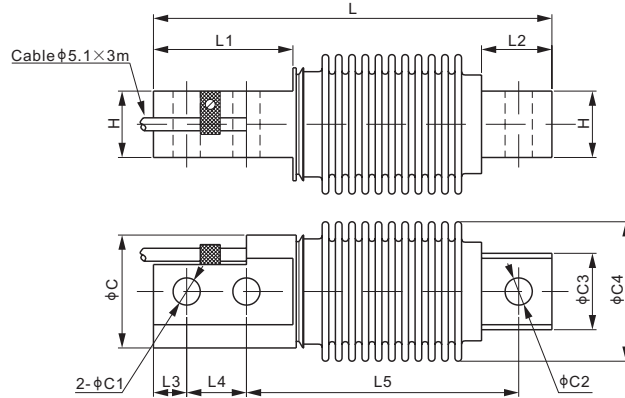

DIMENSIONS

RATED CAPACITY	C	C1	C2	C3	C4	L	L1	L2	L3	L4	L5	H
kg/mm												
5-200	34.0	8.2	8.2	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
350-500	34.0	8.2	10.5	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
500(23A)	34.0	10.5	10.5	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
lb/inches (conversion of above dimensions)												
11.02-440.92	1.34	0.32	0.32	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79
771.62-1,102.31	1.34	0.32	0.41	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79
1,102.31(23A)	1.34	0.41	0.41	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79

SPECIFICATIONS

Full Scale Output	2.0 mV/V $\pm$ 0.25%	Element Material	17-4PH Stainless Steel
Zero Balance	Cap. $\leq$ 20kg: $\pm$ 0.05 mV/V Cap. $>$ 20kg: $\pm$ 0.02 mV/V	Recommended Excitation	10V (15V Maximum)
Deflection at Emax	0.27 - 0.33mm	Insulation Resistance	$>$ 2 [50V DC] G Ω
Non-linearity	$<$ $\pm$ 0.017%	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Repeatability	$<$ $\pm$ 0.017%	Safe Overload	150% of full scale
Hysteresis Error	$<$ $\pm$ 0.017%	Breaking Overload	300% of full scale
Creep in 30 min.	$<$ $\pm$ 0.023%	Seal Type / IP Rating	Welded Seal / IP68
Input Resistance	400 Ω $\pm$ 20	Cable Color Code	Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare
Output Resistance	350 Ω $\pm$ 3		

PART NUMBER*

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	563RS-5kg.....	0.6
10kg.....	563RS-10kg.....	0.6
20kg.....	563RS-20kg.....	0.6
30kg.....	563RS-30kg.....	0.6
50kg.....	563RS-50kg.....	0.6
100kg.....	563RS-100kg.....	0.6
200kg.....	563RS-200kg.....	0.6
350kg.....	563RS-350kg.....	0.6
500kg.....	563RS-500kg.....	0.6
	563RS-500kg-23A.....	0.6

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.



5kg-50kg: NTEP 1:6 000 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell
100kg-500kg: NTEP 1:4 500 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell



10kg-50kg: OIML MAA C6, Y=30 000;
100kg-500kg: OIML MAA C4, Y=30 000

For further available P/N's & specifications per NTEP/OIML classes, please contact us.

INTERCHANGEABLE REFERENCE

Brand	Model
Cardinal.....	CB6
Coti Global.....	CG-Z6
Flintec.....	SB8
HBM.....	Z6*
Mettler-Toledo.....	MTB*
Rice Lake.....	RLHBB
Rice Lake.....	RL9018SS
Vishay Celtron.....	HBB
Vishay Revere Transducers.....	SHB
Vishay Tedeo-Huntleigh.....	355

* Except 500kg. Use 563RS-500kg-23A instead since C1 of 500kg of HBM Z6 and Mettler Toledo MTB: 10.5mm

WEIGH MODULE

Model	Page
563RSM5	160