


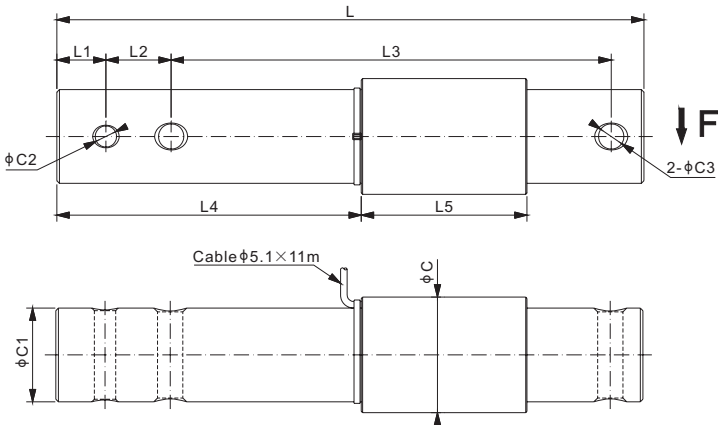

DIMENSIONS

RATED CAPACITY	C	C1	C2	C3	L	L1	L2	L3	L4	L5
Klb/inches										
23	3.54	2.87	0.65	0.78	17.99	1.50	2.00	13.49	9.33	5.08
t/mm (conversion of above dimensions)										
10.43	90.0	73.0	16.6	19.7	457.0	38.2	50.8	342.6	237.0	129.0

SPECIFICATIONS			
Full Scale Output	1.15 mV/V ± 1%	Recommended Excitation	10V (15V Maximum)
Zero Balance	± 0.02 mV/V	Insulation Resistance	>2 [50V DC] GΩ
Non-linearity	< ± 0.05%	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Repeatability	< ± 0.02%	Safe Overload	150% of full scale
Hysteresis Error	< ± 0.05%	Breaking Overload	300% of full scale
Creep in 30 min.	< ± 0.03%	Seal Type / IP Rating	Environmentally Sealed / IP67
Input Resistance	375 ± 25 Ω	Cable Color Code	Exc+ Red Exc- Black
Output Resistance	350 ± 3 Ω		Sig+ Green Sig- White
Element Material	Alloy Steel, Nickel Plated And Electrophoretic Paint		Shield Bare

PART NUMBER*

Rated Capacity	Part No.	Weight Approx. (kg)
23Klb.....	563WH-24B-23Klb-YZ.....	2.25

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.