


102TH

Alloy Steel

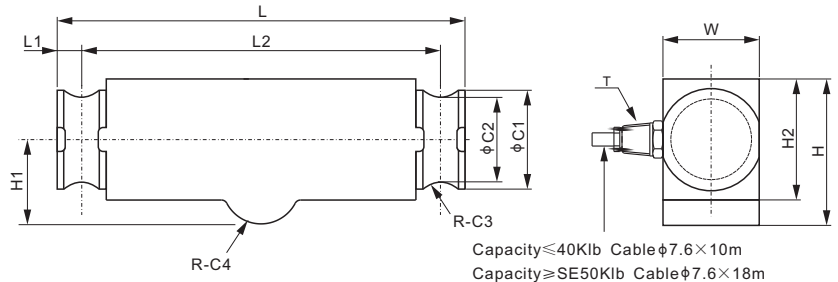

DOUBLE ENDED BEAMS

DIMENSIONS

RATED CAPACITY	C1	C2	C3	C4	H	H1	H2	L	L1	L2	W	T
Klb/inches												
25-40;SE50;SE60;SE75	2.00	1.63	0.50	0.50	2.97	1.75	2.44	8.25	0.50	7.25	1.94	1/2-14 NPT
50-75	2.20	1.70	0.75	1.00	3.47	2.00	2.94	11.50	0.75	10.00	1.94	1/2-14 NPT
100-125	3.20	2.44	1.00	1.50	4.68	2.75	3.86	14.50	1.00	12.50	2.90	1/2-14 NPT
t/mm (conversion of above dimensions)												
6.8-18.1;SE22.7;SE27.2;SE34	50.8	41.4	12.7	12.7	75.4	44.5	62.0	209.6	12.7	184.2	49.3	1/2-14 NPT
22.7-34	55.9	43.2	19.1	25.4	88.1	50.8	74.7	292.1	19.1	254.0	49.3	1/2-14 NPT
45.4-56.7	81.2	62.0	25.4	38.1	118.9	69.9	98.0	368.3	25.4	317.5	73.7	1/2-14 NPT

SPECIFICATIONS

Full Scale Output	3.0 mV/V ± 0.25%	Recommended Excitation	10V (15V Maximum)
Zero Balance	± 0.02 mV/V	Insulation Resistance	>2 [50V DC] GΩ
Non-linearity	< ± 0.023%	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Repeatability	< ± 0.017%	Safe Overload	150% of full scale
Hysteresis Error	< ± 0.023%	Breaking Overload	300% of full scale
Creep in 30 min.	< ± 0.023%	Seal Type / IP Rating	Environmentally Sealed / IP67
Input Resistance	700Ω ± 10	Cable Color Code	Exc+ Red Exc- Black
Output Resistance	700Ω ± 5		Sig+ Green Sig- White
Element Material	Alloy Steel, Nickel Plated		Shield Bare

PART NUMBER*

Rated Capacity	Part No.	Weight (kg) Approx.
25Klb.....	102TH-25Klb.....	4.9
40Klb.....	102TH-40Klb.....	5.2
SE50Klb.....	102TH-SE50Klb.....	6.0
SE60Klb.....	102TH-SE60Klb.....	6.0
SE75Klb.....	102TH-SE75Klb.....	6.1
50Klb.....	102TH-50Klb.....	8.3
60Klb.....	102TH-60Klb.....	8.3
75Klb.....	102TH-75Klb.....	8.5
100Klb.....	102TH-100Klb.....	21.1
125Klb.....	102TH-125Klb.....	21.1

Lightning Protection Version:

75Klb.....	102TH-75Klb-02.....	8.5
------------	---------------------	-----

SE refers to small envelope

NTEP 1:10 000 Class III L, Multiple Cell

11t-55t: OIML MAA C4, Y=15 000

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

WEIGH MODULE

Model	Page
102THM5.....	148

INTERCHANGEABLE REFERENCE

Manufacturer	Model
Coti Global.....	CG-BE40
Rice Lake.....	RL75040
Vishay Celtron.....	DLB
Vishay Revere Transducers.....	9323*
Vishay Revere Transducers.....	9903**
Vishay Sensortronics.....	65040A

* Element material of 9323: stainless steel. Design capacities are 25Klb, 40Klb, SE50Klb, SE60Klb, SE75Klb.

** Element material of 9903: stainless steel. Design capacities are 50Klb, 60Klb, 75Klb.