

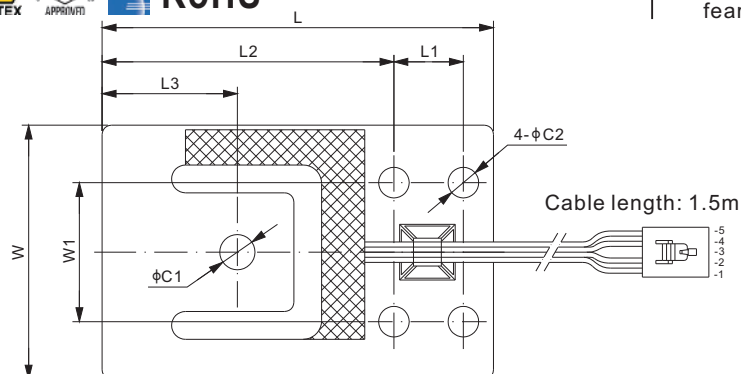


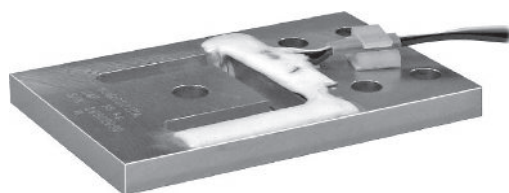

Features:

- Low Profile-Provides ability for scales of roughly 25mm height, in various rectangular shapes / sizes
- Current Calibrated: No J-Box w/Trim Pot required
Direct corner replacement w/o need for re-calibration
- Rated output of $0.9\text{mV/V} \pm 0.1\%$: Pre-derated for ease of planar beam selection for scale capacity
EX: For a 60kg scale capacity-simply use 4x202UA-15kg's
Enables full weight capacity to roll up on scale edge w/o fear of overload

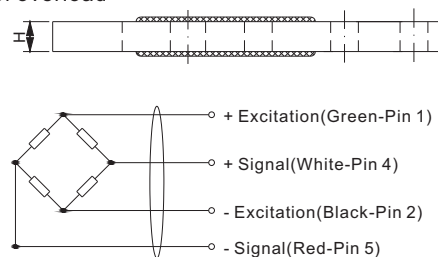

The load cell is provided with a 4 conductor ribbon cable and with AMP#103957-4 connector

DIMENSIONS

RATED CAPACITY	C1	C2	H	L	L1	L2	L3	W	W1
kg/mm									
3.75	5.1	5.1	2.0	70.0	14.0	51.1	23.1	39.0	27.8
7.5	5.1	5.1	3.0	70.0	14.0	51.1	23.1	39.0	27.8
15	7.6	5.1	4.1	70.0	14.0	51.1	23.1	39.0	27.8
37.5	7.6	6.6	4.8	76.2	15.0	55.2	25.9	44.5	30.0
75	7.6	6.6	6.5	84.5	15.0	63.0	29.2	54.8	30.0
150	9.1	8.1	7.9	107.3	22.9	76.6	30.7	69.9	44.5
375	9.1	9.8	12.7	119.4	25.4	84.9	32.3	76.1	50.8

SPECIFICATIONS

Full Scale Output	$0.9\text{ mV/V} \pm 0.1\%$	Element Material	Aluminum
Calibration in mV/V/Q	$\pm 0.05\%$	Recommended Excitation	10V (15V Maximum)
Zero Balance	$\pm 0.02\text{ mV/V}$	Insulation Resistance	$>2 [50\text{V DC}] \text{ G}\Omega$
Non-linearity	$< \pm 0.020\%$	Nominal Temperature Range	-10°C to 40°C / 14°F to 104°F
Repeatability	$< \pm 0.017\%$	Safe Overload	150% of full scale
Hysteresis Error	$< \pm 0.015\%$	Breaking Overload	300% of full scale
Creep in 30 min.	$< \pm 0.015\%$	Seal Type / IP Rating	Environmentally Sealed / IP65
Input Resistance	$1190\Omega \pm 10$	Cable Color Code	Exc+ Green Exc- Black Sig+ White Sig- Red
Output Resistance	$1000\Omega \pm 10$		

PART NUMBER

Rated Capacity	Part No.	Weight (kg) Approx.
3.75kg	202UA-3.75kg-02	0.1
7.5kg	202UA-7.5kg-02	0.1
15kg	202UA-15kg-02	0.1
37.5kg	202UA-37.5kg-02	0.1
75kg	202UA-75kg-02	0.1
150kg	202UA-150kg-02	0.2
375kg	202UA-375kg-02	0.4

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Flintec	PB
Rice lake	RL BLP

INSTALLATION DRAWING

