


563RS

Stainless Steel

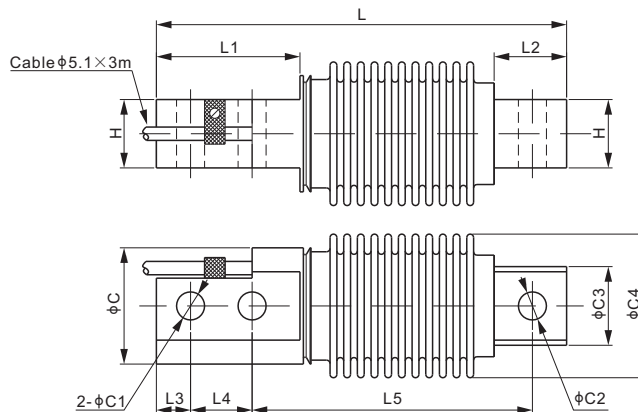

SINGLE ENDED BEAMS

DIMENSIONS

RATED CAPACITY	C	C1	C2	C3	C4	L	L1	L2	L3	L4	L5	H
kg/mm												
5-200	34.0	8.2	8.2	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
350-500	34.0	8.2	10.5	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
500(23A)	34.0	10.5	10.5	23.0	42.0	120.0	42.0	21.2	10.0	18.0	82.0	20.0
lb/inches (conversion of above dimensions)												
11.02-440.92	1.34	0.32	0.32	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79
771.62-1,102.31	1.34	0.32	0.41	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79
1,102.31(23A)	1.34	0.41	0.41	0.91	1.65	4.72	1.65	0.83	0.39	0.71	3.23	0.79

SPECIFICATIONS

Full Scale Output	2.0 mV/V \pm 0.25%	Element Material	17-4PH Stainless Steel
Zero Balance	Cap. \leq 20kg: \pm 0.05 mV/V	Recommended Excitation	10V (15V Maximum)
	Cap. $>$ 20kg: \pm 0.02 mV/V	Insulation Resistance	$>$ 2 [50V DC] G Ω
Deflection at Emax	0.27 - 0.33mm	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Non-linearity	$<$ \pm 0.017%	Safe Overload	150% of full scale
Repeatability	$<$ \pm 0.017%	Breaking Overload	300% of full scale
Hysteresis Error	$<$ \pm 0.017%	Seal Type / IP Rating	Welded Seal / IP68
Creep in 30 min.	$<$ \pm 0.023%	Cable Color Code	Exc+ Red Exc- Black
Input Resistance	400 Ω \pm 20		Sig+ Green Sig- White
Output Resistance	350 Ω \pm 3		Shield Bare

PART NUMBER*

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	563RS-5kg.....	0.6
10kg.....	563RS-10kg.....	0.6
20kg.....	563RS-20kg.....	0.6
30kg.....	563RS-30kg.....	0.6
50kg.....	563RS-50kg.....	0.6
100kg.....	563RS-100kg.....	0.6
200kg.....	563RS-200kg.....	0.6
350kg.....	563RS-350kg.....	0.6
500kg.....	563RS-500kg.....	0.6
	563RS-500kg-23A.....	0.6

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

5kg-50kg: NTEP 1:6 000 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell
100kg-500kg: NTEP 1:4 500 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell

10kg-50kg: OIML MAA C6, Y=30 000;
100kg-500kg: OIML MAA C4, Y=30 000

For further available P/N's & specifications per NTEP/OIML classes, please contact us.

INTERCHANGEABLE REFERENCE

Brand	Model
Cardinal.....	CB6
Coti Global.....	CG-Z6
Flintec.....	SB8
HBM.....	Z6*
Mettler-Toledo.....	MTB*
Rice Lake.....	RLHBB
Rice Lake.....	RL9018SS
Vishay Celtron.....	HBB
Vishay Revere Transducers.....	SHB
Vishay TedeA-Huntleigh.....	355

* Except 500kg. Use 563RS-500kg-23A instead since C1 of 500kg of HBM Z6 and Mettler Toledo MTB: 10.5mm

WEIGH MODULE

Model	Page
563RSM5.....	156

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.