


## ABS; Wireless Weighing Indicator



### Keyboard Configuration

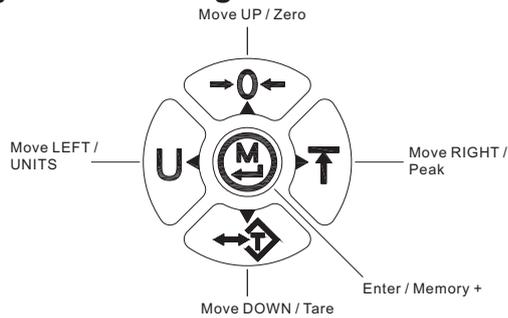

### Features:


- Designed to use widely available AA batteries (not included)
- Fully charged battery works for 100 hours
- Material: ABS
- IP Rating: IP65
- LCD 6-digit display with LED backlight
- Non-volatile memory for reliable data saving
- Units of Measurement: kg, g, t, lb, Klb, N, kN, oz, user-defined unit
- Configurable 2 set-points for precaution and warning
- User-selectable display interval
- Overloading recording
- 10 user-selectable analog-to-digital converting frequency
- Weight calibration and digital calibration
- User-selectable auto power-off and power-saving timing
- Functions: Auto-Zero-Tracking, Auto-Zero, Manual-Zero, Hold, Peak-Hold, TARE

GENERAL SPECIFICATIONS	
Enclosure Material	ABS
Units of Measurement	kg, g, t, lb, Klb, N, kN, oz, user-defined unit
Working Humidity	≤90% RH
Working Temperature	-20°C to 70°C / -4°F to 158°F
Dimensions	170mm × 98mm × 34mm
	6.7in × 3.9in × 1.34in
Display Type	LCD
Display Digits	6 digits
Digit Height	16.8mm / 0.66in
Display Dimensions	72mm × 27mm / 2.8in × 1.1in
Power Supply	3 × AA Alkaline batteries (not included)
IP Rating	IP65

TECHNICAL SPECIFICATIONS	
Division	0.001; 0.002; 0.005; 0.01; 0.02; 0.05; 0.1; 0.2; 0.5; 1; 2; 5; 10; 20; 50
Tare Range	100% Full Scale
Min. Power Consumption	1.26mW
Max. Power Consumption	6.25mW
Wireless Distance	Up to 30m (98ft) at lowest power set up and up to 75m (246ft) at highest power set up (no obstructions)

### PART NUMBER

Part No.	Communication Interface	Weight (kg)
805HP-01-WL01...	805HP, no RS-232, 433 frequency	0.36
805HP-01-WL02...	805HP, no RS-232, 915 frequency	0.36
805HP-02-WL01...	805HP, yes RS-232, 433 frequency	0.36
805HP-02-WL02...	805HP, yes RS-232, 915 frequency	0.36

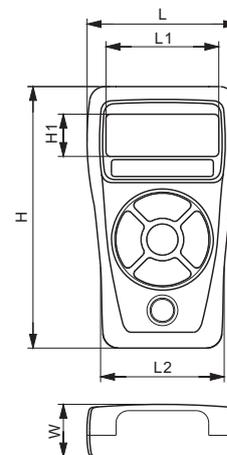

### DIMENSIONS

	H	H1	L	L1	L2	W
inches	6.7	1.1	3.9	2.8	3.2	1.3
mm	170	27	98	72	80	34