




### 1. Special Features


- Can be connected with 4 load cells
- Each connection has independent adjustable resistance, excitation trim
- Aluminum casting



### 2. Dimensions (in mm; 1mm=0.03937 inches)

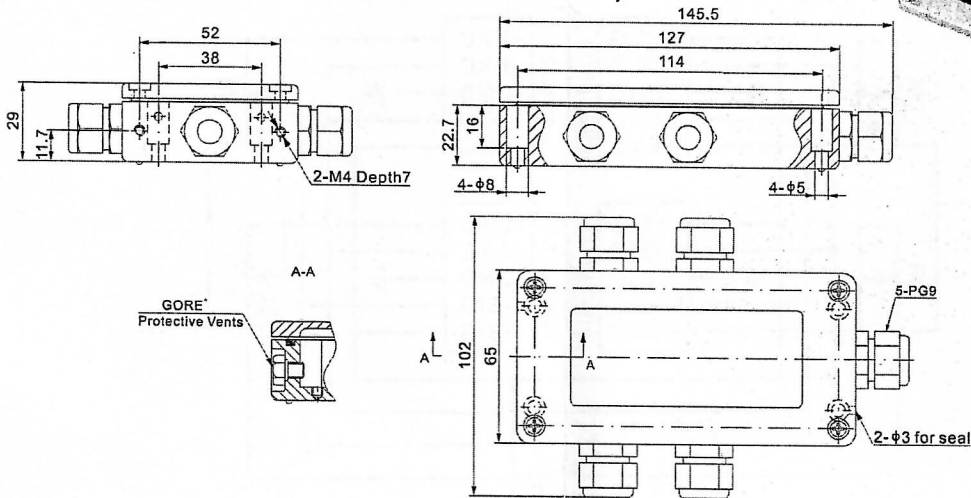

### 3. Connecting Diagram

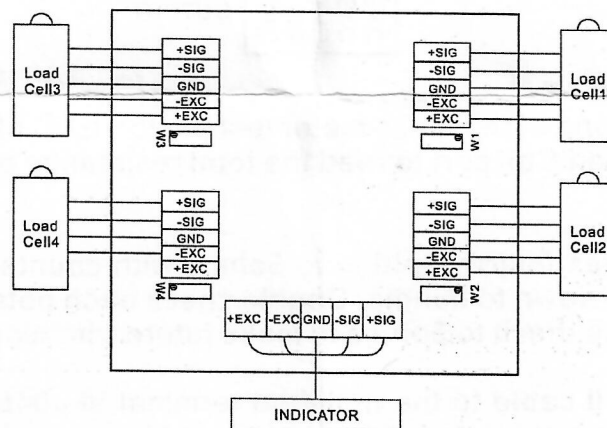

### 4. Technical Data

Type	J04EA-16	
Trimming	Excitation trim	
Weight, approx	kg	0.5
Max. Permissible Voltage	V	18
Materials	Aluminum	
Outline (L*W*H)	mm	145.5*102*29
Nominal Temperature Range	°C [°F]	-10...+50 [14...122]
Storage Temperature Range	°C [°F]	-20...+60 [-4...140]
Cable Connection for Cable Diameter	Input: PG9: 4-8mm, Output: PG9: 4-8mm	
Protection Class According to IEC529	IP65	

### 5. Application

4 channel signals generated from the load cells which distributed at the corners of the weighing platform, synthesize into one channel signal and send to the weighing indicator after balance adjustment.



