



## OCSA Series


### FEATURES

- Fast resolution switching
- LED display 5 digits 1.5inch (38mm)
- Fixed hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

### OPTION

- LCD display version, model OCSA4

<b>Model</b>	<b>OCSA3</b>
<b>Type</b>	General
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting aluminum
<b>Capacity Available</b>	20/30/40Klb
<b>Battery Life</b>	100Hours
<b>High Quality Load Receptor</b>	Alloy Steel
<b>Shackle</b>	H.D. Bow
<b>Hook</b>	H.D. Eye
<b>High Capacity Rechargeable Battery</b>	Yes 6V/10Ah
<b>Infrared Remote Control</b>	Yes

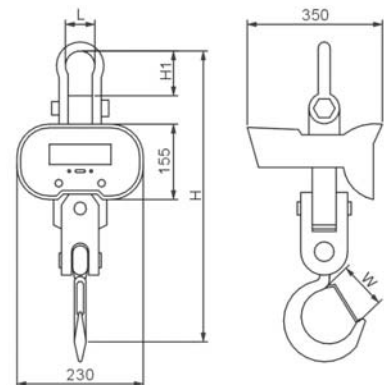

Rated Capacity	Division	H	H1	L	W	N.W.	G.W.
20Klb/10t	10lb/5kg	770mm/30.3"	147mm/5.7"	94mm/3.7"	60mm/2.4"	43kg/95lb	50kg/100lb
30Klb/15t	10lb/5kg	860mm/33.9"	178mm/7.0"	128mm/5.0"	75mm/3.0"	61kg/134lb	73kg/161lb
40Klb/20t	20lb/10kg	950mm/37.4"	250mm/9.8"	135mm/5.3"	75mm/3.0"	64kg/141lb	76kg/168lb

\*Dimensions and specifications are subject to change without notice.