



OCSA Series


FEATURES

- Fast resolution switching
- LED display 5 digits 1.5inch (38mm)
- Fixed hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

OPTION

- LCD display version, model OCSA4

Model	OCSA3
Type	General
Accuracy Class	Following OIML R76, Class III, NOT certified
Enclosure	Die-casting aluminum
Capacity Available	20/30/40Klb
Battery Life	100Hours
High Quality Load Receptor	Alloy Steel
Shackle	H.D. Bow
Hook	H.D. Eye
High Capacity Rechargeable Battery	Yes 6V/10Ah
Infrared Remote Control	Yes

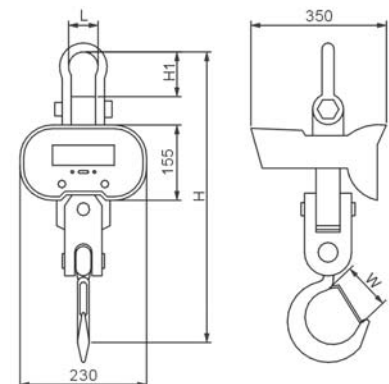

Rated Capacity	Division	H	H1	L	W	N.W.	G.W.
20Klb/10t	10lb/5kg	770mm/30.3"	147mm/5.7"	94mm/3.7"	60mm/2.4"	43kg/95lb	50kg/100lb
30Klb/15t	10lb/5kg	860mm/33.9"	178mm/7.0"	128mm/5.0"	75mm/3.0"	61kg/134lb	76kg/168lb
40Klb/20t	20lb/10kg	950mm/37.4"	250mm/9.8"	135mm/5.3"	75mm/3.0"	64kg/141lb	78kg/172lb

*Dimensions and specifications are subject to change without notice.