




## OCSC Series

### FEATURES

- Fast resolution switching
- Supplied with 2 rechargeable batteries
- 38mm 5 digits LED display
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

### OPTION

- Wireless Scoreboard
- LCD display version, model OCSC4

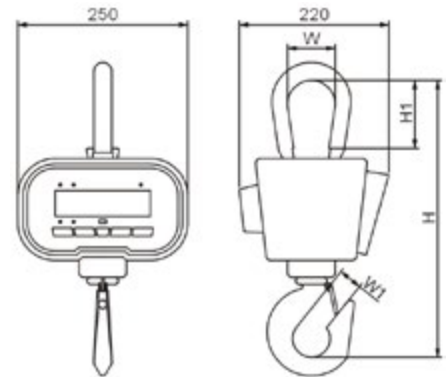

<b>Model</b>	<b>OCSC3</b>
<b>Type</b>	Convenience
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting aluminum
<b>Display</b>	38mm LED
<b>Capacity Available</b>	2 / 4 / 6 / 10 Klb
<b>Battery Life</b>	80 Hours ( with 2 batteries)
<b>High Quality Load Receptor</b>	Alloy Steel
<b>Shackle</b>	H.D. Fixed
<b>Hook</b>	H.D. Rotatable
<b>High Capacity Rechargeable Battery</b>	Yes (Easy to exchange) 6V/3.2Ahx2
<b>Infrared Remote Control</b>	Yes

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
2Klb	1 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
4Klb	2 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
6Klb	2 lb	420mm / 16.54"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	11.5kg / 24.4 lb	14kg / 31.0 lb
10Klb	5 lb	480mm / 18.90"	115mm / 4.53"	85mm / 3.35"	40mm / 1.57"	15kg / 33.1 lb	18kg / 39.7 lb

\*Dimensions and specifications are subject to change without notice.