




OCSL Series

FEATURES

- Fast resolution switching
- LCD display 5 digits 0.7inch (18mm)
- Fixed hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb / N
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

Model	OCSL
Type	Mini
Accuracy Class	Following OIML R76, Class III, NOT certified
Enclosure	Die-casting Aluminum
Capacity Available	60/120/250/400/600lb
Battery Life	100Hours
Shackle	Stainless Steel
Hook	Stainless Steel
Battery	3 x AA
Infrared Remote Control	No

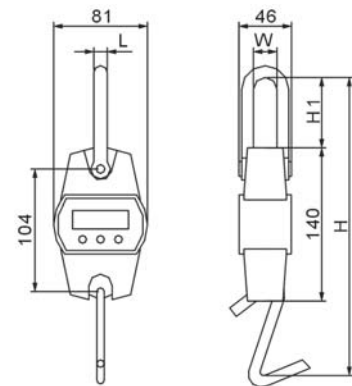

Rated Capacity	Division *	H	H1	L	W	N.W.	G.W.
60lb/30kg	0.02lb/0.01kg	265mm/10.4"	70mm/2.8"	10mm/0.4"	20mm/0.8"	540g/1.2lb	0.8kg/1.8lb
120lb/60kg	0.05lb/0.02kg	265mm/10.4"	70mm/2.8"	10mm/0.4"	20mm/0.8"	540g/1.2lb	0.8kg/1.8lb
250lb/120kg	0.10lb/0.05kg	265mm/10.4"	70mm/2.8"	10mm/0.4"	20mm/0.8"	540g/1.2lb	0.8kg/1.8lb
400lb/200kg	0.2lb/0.1kg	265mm/10.4"	70mm/2.8"	10mm/0.4"	20mm/0.8"	540g/1.2lb	0.8kg/1.8lb
600lb/300kg	0.2lb/0.1kg	265mm/10.4"	70mm/2.8"	10mm/0.4"	20mm/0.8"	540g/1.2lb	0.8kg/1.8lb

*Primary unit as lb; kg/lb conversion by 2.2 but not by increment of 1,2 or 5 when in kg.

*Dimensions and specifications are subject to change without notice.