

## OCSZ Series


### FEATURES

- Fast resolution switching
- 56mm 5 digits LED display
- Fixed hook
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Weight accumulation function
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function



### OPTION

- Wireless Scoreboard

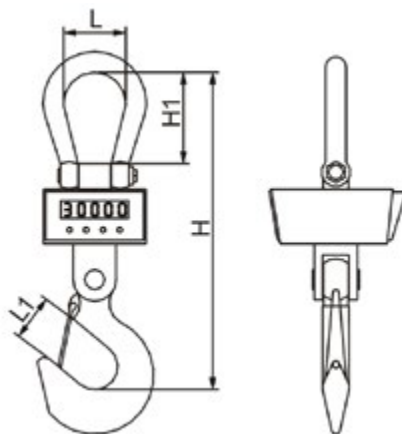

<b>Model</b>	<b>OCSZ</b>
<b>Type</b>	Heavy Duty
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Whole Steel Anti-collision
<b>Display</b>	56mm LED
<b>Capacity Available</b>	20 / 30 / 40 / 60 / 100 Klb
<b>Battery Life</b>	80 Hours
<b>High Quality Load Receptor</b>	Alloy Steel
<b>Shackle</b>	H.D. Bow
<b>Hook</b>	H.D. Eye
<b>High Capacity Rechargeable Battery</b>	Yes 6V/10Ah*
<b>Infrared Remote Control</b>	Yes

\* With Terminal Top Plate (OCS-6V10Ah-BATCAP)

Rated Capacity	Division	H	H1	L	L1	N.W.	G.W.
20Klb	10 lb	850mm / 33.46"	140mm / 5.51"	105mm / 4.13"	70mm / 2.76"	60kg / 132.3 lb	72kg / 158.9 lb
30Klb	10 lb	900mm / 35.43"	160mm / 6.30"	140mm / 5.51"	75mm / 2.95"	80kg / 176.4 lb	--
40Klb	20 lb	950mm / 37.40"	180mm / 7.09"	150mm / 5.91"	80mm / 3.15"	95kg / 209.4 lb	--
60Klb	20 lb	1120mm / 44.09"	215mm / 8.46"	165mm / 6.50"	90mm / 3.54"	165kg / 363.8 lb	200kg / 400.9 lb
100Klb	50 lb	1350mm / 53.15"	235mm / 9.25"	180mm / 7.09"	105mm / 4.13"	395kg / 870.8 lb	--

\*Dimensions and specifications are subject to change without notice.