


ANYLOAD[®]

FSP-Series Floor Scales

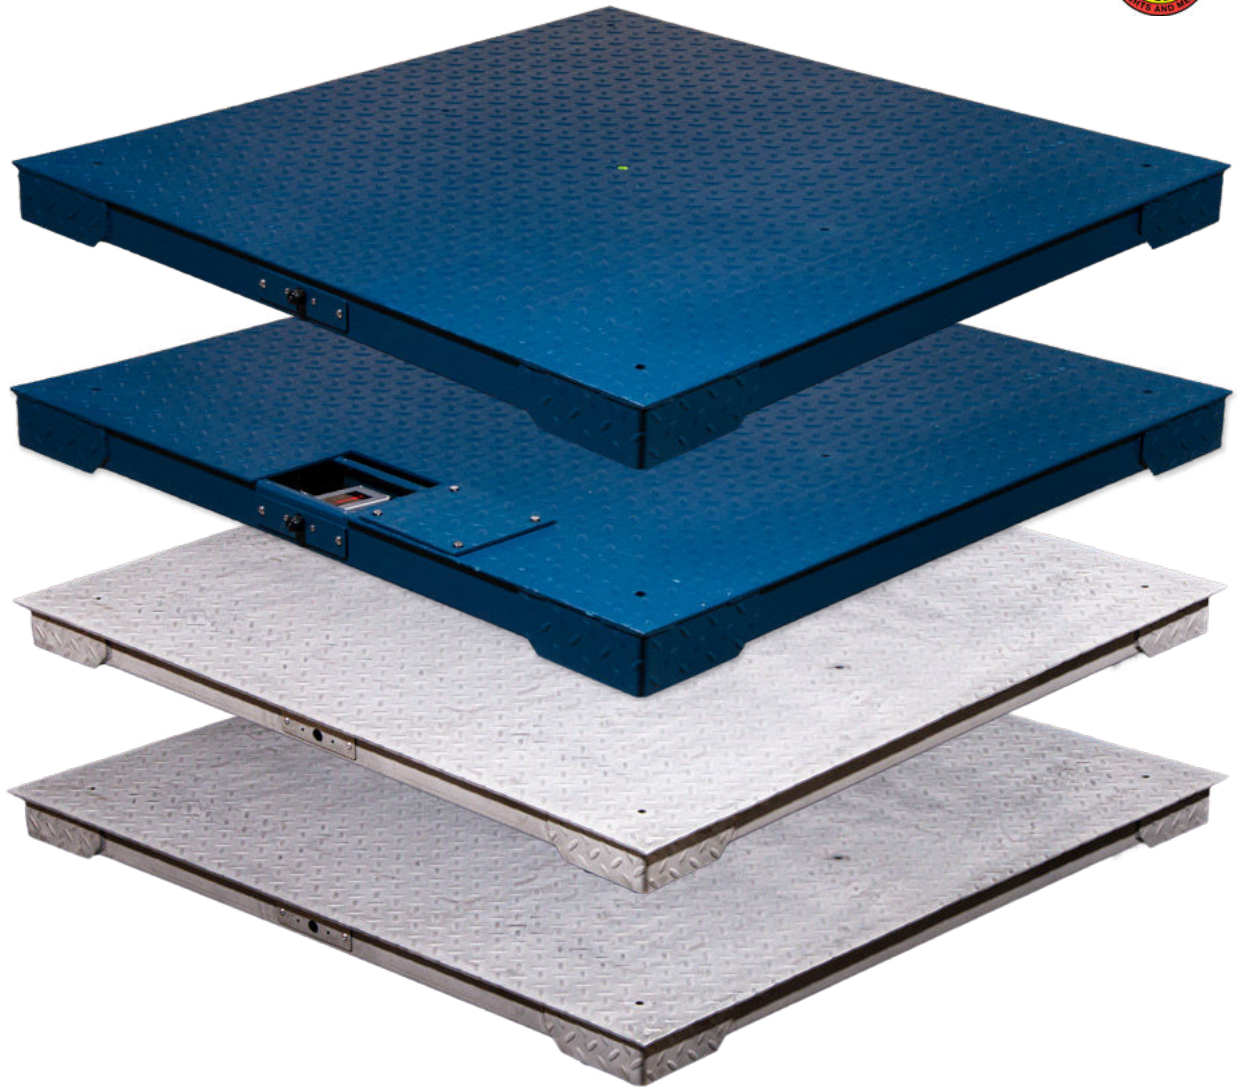

Performance You Can Measure

IP67

Waterproof

150%

Safe Overload

0.20"

Deck Plate Thickness
0.24" Options Available

1-855-269-5623
info@anyload.com
www.anyload.com

FSP Product Page




Models

ANYLOAD has designed and manufactured scales and load cells for over 30 years. Our products are trusted to provide reliable weighing to end-users in the most challenging conditions.

STANDARD

Model: FSP
MILD STEEL
All-Purpose Heavy Duty

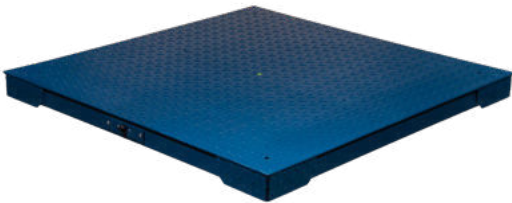


All-Purpose Heavy Duty



DUAL ACCESS

Model: FSP-TA
MILD STEEL
Dual J-Box Access (Top & Side)

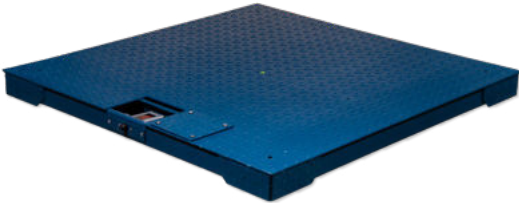

All-Purpose Heavy Duty



GALVANIZED

Model: FSP-GI
MILD STEEL
Hot Dip Galvanized
Anti-Corrosion Zinc Plating




Anti-Corrosion Coating




STAINLESS STEEL


Model: FSP-SS
17-4PH aerospace and 304 food-grade stainless steel for harshest environments

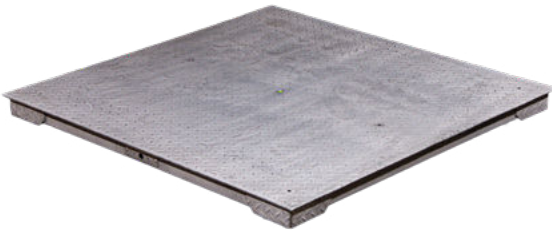

High Corrosion Resistance



Thin side edge
Competitors
Heavy Duty



Narrow Channel
Competitors
Heavy Duty



Thick Channel
ANYLOAD
Heavy Duty

ANYLOAD floor scales are built to the highest standards to ensure longevity and performance. Our scales stand up to higher loads, rougher handling, and harsher environments.

Light Duty





Heavy Duty






Features

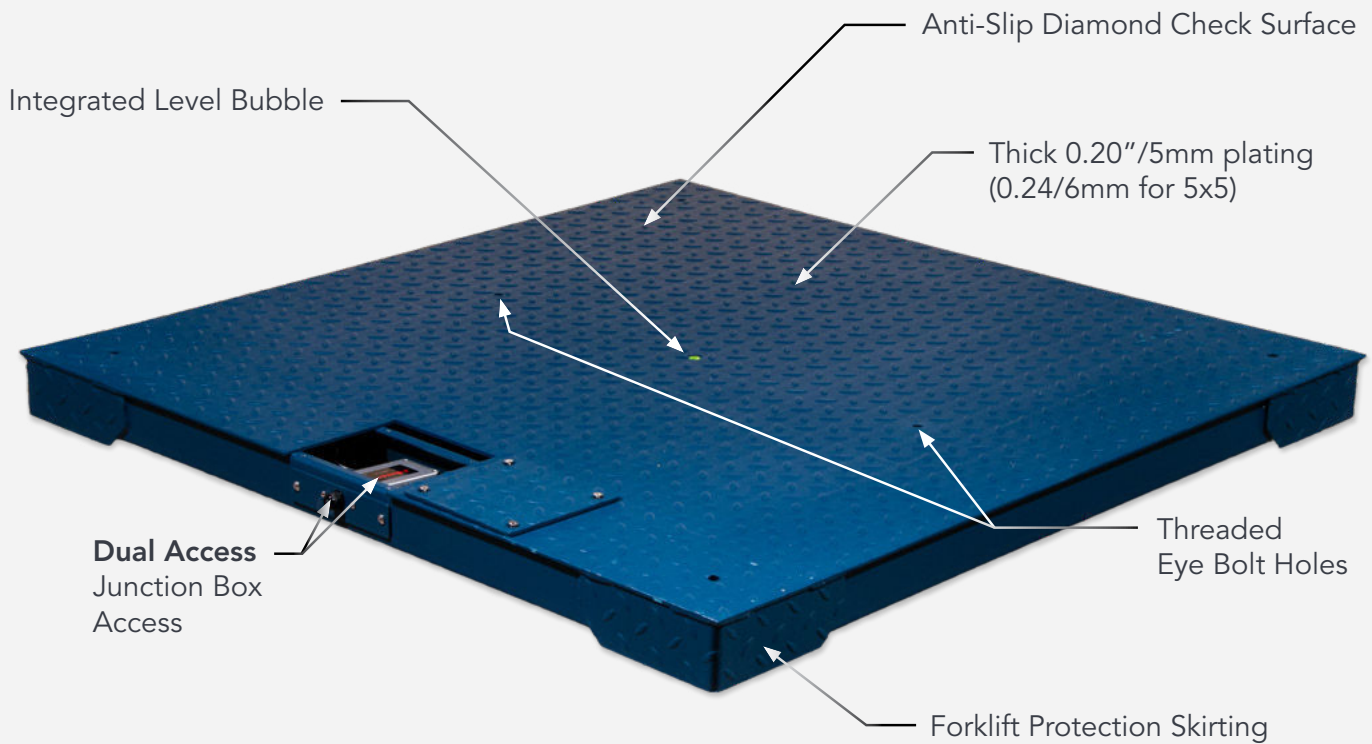

Powder-Coated
Mild Steel




Anti Corrosion
Galvanized Mild Steel



Food-Grade
304 Stainless Steel




Demanding Environments
Industrial and Wet Conditions

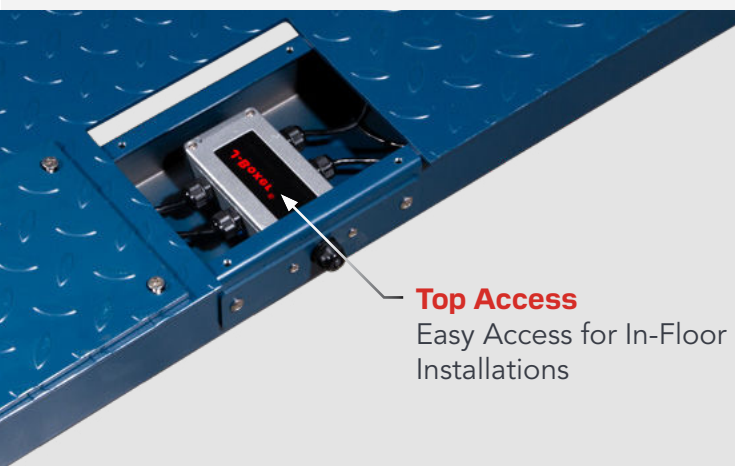

Top Access
Easy Access for In-Floor
Installations

Self Correcting Feet
Ensure ideal loading
under variable conditions


High Quality Welds
Longer Service Life

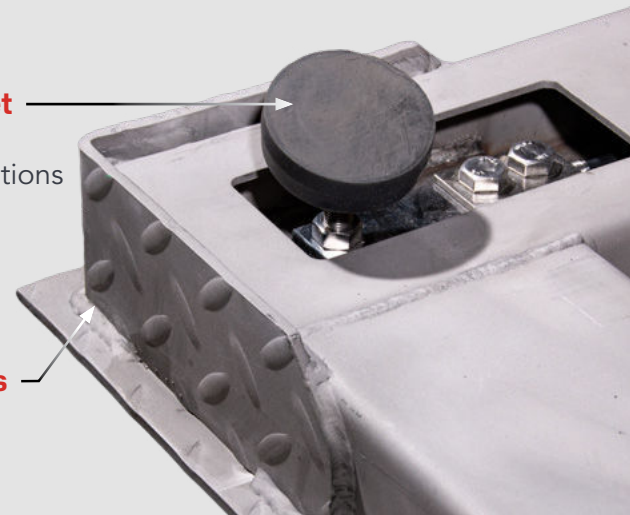

FSP-Series Options

Accessories

Ramp



Bumper Guard



815BS Indicator
Battery
400+ Hours



815TS Indicator
2 set point output
relays
LED Display



Notes:

Approvals:	FSP	TA	GI	SS
NTEP-Certified, Class III 5000 (1Klb-10Klb)	✓	✓	✓	✓
Measurement Canada (1Klb-5Klb)	✓	✓	✓	✓

Certified Versions Available

Features:	FSP	TA	GI	SS
Mild Steel	✓	✓	✓	
Stainless Steel				✓
Reinforced Corner Skirting	✓	✓	✓	✓
Dual Access for Junction Box		✓		
Threaded Eye Bolt Holes	✓	✓	✓	✓

Included:	FSP	TA	GI	SS
2x Eye Bolt	✓	✓	✓	✓
Level Bubble	✓	✓	✓	✓
1x IP67 Aluminum Junction Box (J04EA-16)	✓	✓	✓	
1x IP65 Stainless Steel Junction Box (J04ES-FS)				✓
4x 563YH-23 Load Cells	✓	✓	✓	
4x 563YS Load Cells				✓
4x AMFS4 Feet w/ Removable Rubber Cap				✓
4x AMF Feet w/ Removable Rubber Cap	✓	✓	✓	

Model	Size	Capacity	Weight (Est.)
FSP	3'x3'	1Klb, 2Klb, 5Klb	72kg / 159lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5'x5'	5Klb, 10Klb	200kg / 441lb
	5'x5'-LE	10Klb	210kg / 463lb
	4'x6'	5Klb, 10Klb	-
	5'x7'	5Klb, 10Klb	-
FSP-TA	4'x4'	5Klb	120kg / 265lb
FSP-GI	4'x4'	5Klb	138kg / 304lb
FSP-SS	3'x3'	1Klb, 2Klb, 5Klb	75kg / 165lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5'x5'	5Klb, 10Klb	200kg / 441lb
	4'x6'	5Klb, 10Klb	180kg / 397lb
	5'x7'	5Klb, 10Klb	260kg / 573lb

Sales and Technical Assistance:

ANYLOAD®

1-855-269-5623

info@anyload.com

www.anyload.com