


Description:

The MK4-563RSM5 offers a stainless steel constructed washdown IP68/69K certified waterproof product. Ideal for chemical-and food-related applications, the kit provides outstanding performance in hostile environments, built to last in any messy situation. The OIML and NTEP approved load cells deliver accurate readings for lower capacities up to 500kg. Common applications include batching/blending and chemical/food processing. Two slots on the baseplate facilitate ease of use. Each kit comes with an IP67 water-resistant junction box and 65ft of cable.



Load Cell Certifications:

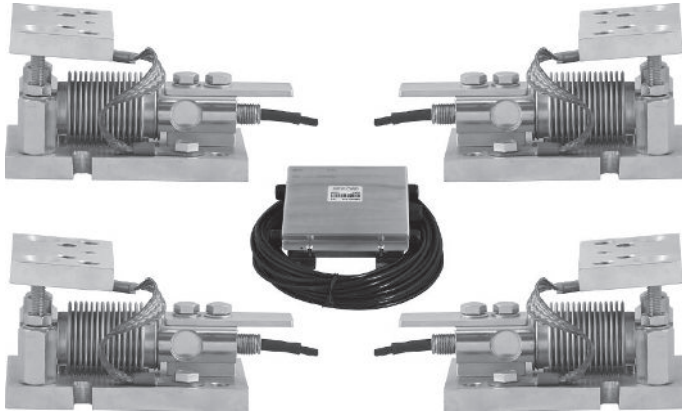

Features:

- NTEP certified load cells from 5kg-500kg
- OIML certified load cells from 10kg-500kg
- CE, RoHS, and ExNepsi certified load cells
- IP68/IP69K certified waterproof construction
- Uplift protection and overload protection
- Conventional wiring and color code

PART NUMBER		
Load Cell Capacity	Part No.	Weight Approx. (kg/lb)
10kg.....	MK4-563RSM5-10kg-S.....	12.0/26.5
20kg.....	MK4-563RSM5-20kg-S.....	12.0/26.5
50kg.....	MK4-563RSM5-50kg-S.....	12.0/26.5
100kg.....	MK4-563RSM5-100kg-S.....	12.0/26.5
200kg.....	MK4-563RSM5-200kg-S.....	12.0/26.5
500kg.....	MK4-563RSM5-500kg-S.....	12.0/26.5

Complete Set Includes:

- (4 pcs) Four 563RS Stainless Steel single-ended shear beam load cells
- (4 pcs) Four 563RSM5 Stainless Steel weigh modules
- (1 pcs) One J04SS water-resistant junction box
- (1 roll) 65ft (20m) cable, 4-wire PVC cable with both copper braid & foil shielding (CB4-5.1-20m)

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.