




Features:

- Work capacity: 1t; 5t
- Test load: 200% rated capacity
- Breaking load: 400% rated capacity
- Made of SS304 corrosion resistant material
- High tensile shackle, product meets ISO2415-2004

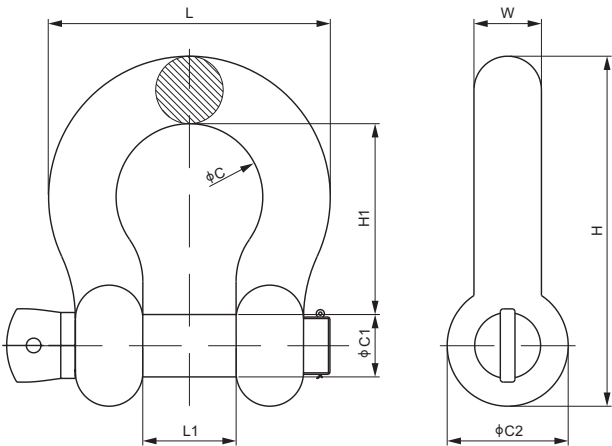

DIMENSIONS

| PART NUMBER                             | C    | C1   | C2   | H     | H1   | L    | L1   | W    | Safe Working Load | Shipping Weight |
|-----------------------------------------|------|------|------|-------|------|------|------|------|-------------------|-----------------|
| mm                                      |      |      |      |       |      |      |      |      |                   |                 |
| RBXS-1t                                 | 45   | 12   | 24   | 85    | 55   | 68   | 25   | 12   | 1t                | 0.23kg          |
| RBXS-5t                                 | 43   | 20   | 40   | 108.5 | 60.5 | 79   | 27   | 18   | 5t                | 0.75kg          |
| inches (conversion of above dimensions) |      |      |      |       |      |      |      |      |                   |                 |
| RBXS-1t                                 | 1.77 | 0.47 | 0.94 | 3.35  | 2.17 | 2.68 | 0.98 | 0.47 | 2.20Klb           | 0.51lb          |
| RBXS-5t                                 | 1.69 | 0.79 | 1.57 | 4.27  | 2.38 | 3.11 | 1.06 | 0.71 | 11.02Klb          | 1.65lb          |

SHACKLES, EYEBOLTS, ROD END