ANYLOAD®

# 563YS30 / 563YSM3-02

Load Cell & Mount

## 563YS30

Single Ended Beam

IP68

***STAINLESS STEEL***
***WELDED SEAL***

**Options:**

- FM, ATEX, IEcEX Approved



PRODUCT PAGE

## 563YSM3-02

Compression Weigh Module


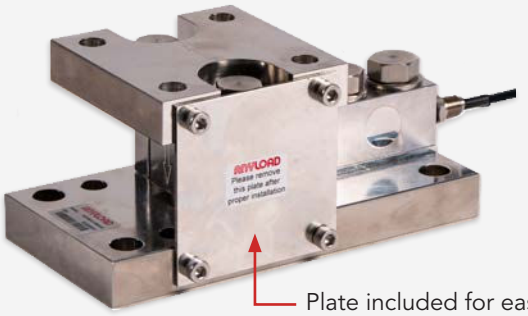


Plate included for easy installation.

**Features:**

- Anti-lifting and overloading protection
- Rocker pin loading design
- Equipped with lateral stops

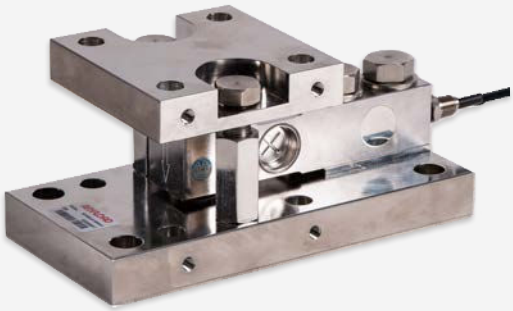

PRODUCT PAGE

# 563YSM3-02
## 3, 4 Module Kits



| Part Number / Capacity | J-Box | Cable |
|---|---|---|
| **3 Module Kit** | *J-Box (specify model when ordering) | |
| MK3-563YSM3-**1Klb**-S | **J04SS** | 1 roll (65ft/20m) |
| MK3-563YSM3-**2.5Klb**-S | | |
| MK3-563YSM3-**4Klb**-S | | |
| MK3-563YSM3-**SE5Klb**-S | | |
| MK3-563YSM3-**5Klb**-S | | |
| MK3-563YSM3-**10Klb**-S | | |
| **4 Module Kit** | *J-Box (specify model when ordering) | |
| MK4-563YSM3-**1Klb**-S | **J04SS** | 1 roll (65ft/20m) |
| MK4-563YSM3-**2.5Klb**-S | | |
| MK4-563YSM3-**4Klb**-S | | |
| MK4-563YSM3-**SE5Klb**-S | | |
| MK4-563YSM3-**5Klb**-S | | |
| MK4-563YSM3-**10Klb**-S | | |

**J-Box Options:** Signal or Excitation / Aluminum, Stainless Steel or Fiberglass Enclosure

## Complete Kit Includes

- 563YS30 Load Cells
- 563YSM3-02 Mounts
- Junction Box (Signal or Exc)
- Load Cell Cable


## Features


- Capacities (per module) 500lb-10,000 lb
- Low maintenance, High performance
- Anti-lifting and overloading protection
- Rocker pin loading design
- Equipped with lateral stops

## Applications

- Light to medium tanks and hoppers

## Drawings

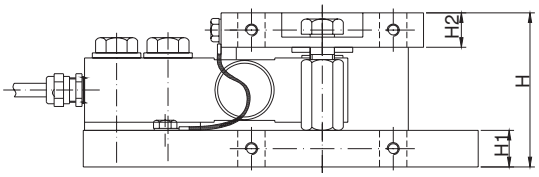

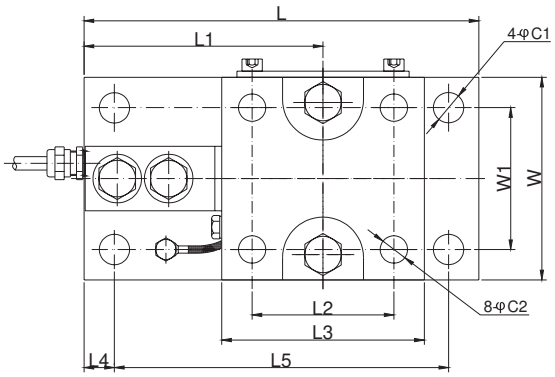
## Dimensions (inches)

| Capacity | C1 | C2 | H | H1 | H2 | L | L1 | L2 | L3 | L4 | L5 | W | W1 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 500lb-4Klb; SE5Klb | 0.59 | 0.53 | 2.99 | 0.71 | 0.67 | 7.68 | 4.65 | 2.76 | 3.94 | 0.59 | 6.50 | 3.94 | 2.76 |
| 5-10Klb | 0.71 | 0.59 | 4.33 | 1.06 | 0.98 | 9.57 | 6.00 | 3.35 | 4.72 | 0.75 | 8.07 | 4.72 | 3.35 |



www.anyload.com | Phone: 1-855-269-5623
© 2024 Anyload Weigh & Measure Inc. Specifications subject to change without notice.