563RS / 563RSM5
Load Cell & Mount

563RS
Single Ended Beam

IP68

STAINLESS STEEL

Options:

- FM, ATEX, IECEx Approved




PRODUCT PAGE

563RSM5
Compression Weigh Module

Features:

- Self-checking with 50% rated load anti-lifting protection
- Multi-directional overloading isolation
- Lateral Stops

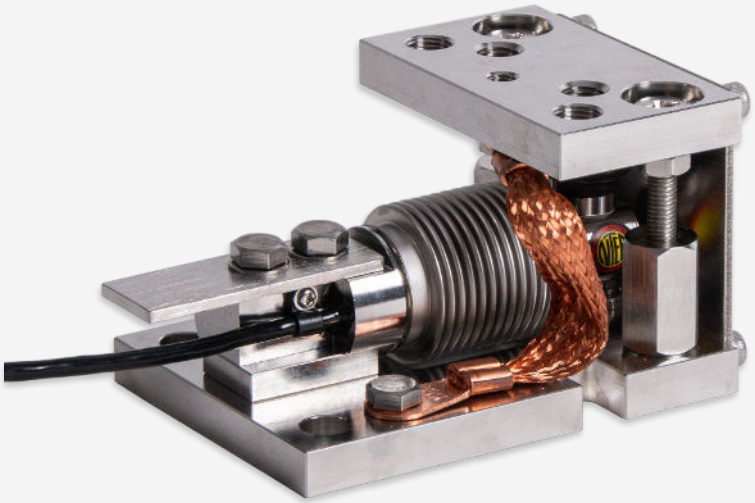

PRODUCT PAGE

1-855-269-5623
www.anyload.com

Load Cells and Mounts sold separately **(unless in a kit)**

563RSM5 Kits →

563RSM5

3, 4 Module Kits



Part Number / Capacity	J-Box	Cable
3 Module Kit	*J-Box (specify model when ordering)	
MK3-563RSM5-**10kg**-S	**J04SS**	1 roll (65ft/20m)
MK3-563RSM5-**20kg**-S		
MK3-563RSM5-**50kg**-S		
MK3-563RSM5-**100kg**-S		
MK3-563RSM5-**200kg**-S		
4 Module Kit	*J-Box (specify model when ordering)	
MK4-563RSM5-**10kg**-S	**J04SS**	1 roll (65ft/20m)
MK4-563RSM5-**20kg**-S		
MK4-563RSM5-**50kg**-S		
MK4-563RSM5-**100kg**-S		
MK4-563RSM5-**200kg**-S		

MK4 J-Box: Signal or Excitation, Stainless Steel or Fiberglass Enclosure

Complete Kit Includes

- 563RS Load Cells
- 563RSM5 Mounts
- Junction Box (Signal or Exc)
- Load Cell Cable


Features


- Capacities (per module) 5-200kg
- Self-checking with anti-lifting protection
- Multi-directional overloading isolation for the load cell
- Lateral Stops


Applications

- Outdoor Tank and Vessel Weighing

Drawings

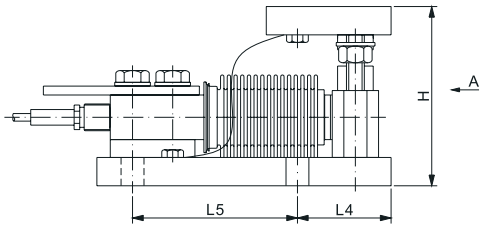



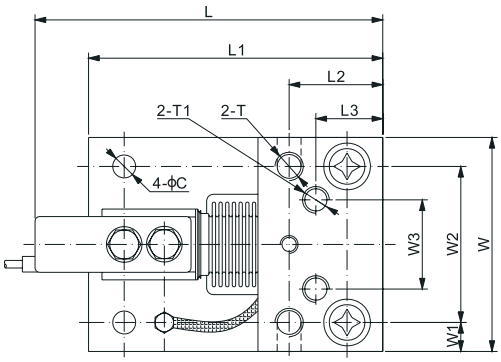

Dimensions (inches)

Capacity	C	H	H1	L	L1	L2	L3	L4	L5	W	W1	W2	W3	T	T1
5-200kg	0.51	3.15	0.50	6.14	5.20	1.65	1.18	1.65	2.99	3.78	0.51	2.76	1.57	1/2-20 UNF	M12

© 2025 Anyload Weigh & Measure Inc.
Specifications subject to change without notice.