


FSP Series

FEATURES

- Ultra heavy duty steel construction
- Extra thickness -- 6mm thick deck plate with frame construction
- Symmetrical grid channel frame
- Painted mild steel
- Pre-corner error adjustment
- Threaded eyebolt holes for easy lifting (eyebolts included)
- Installed with:
 - *4 high accuracy IP67 alloy steel shear beam load cells (563YH) (OIML MAA C6, Y=8,500 and NTEP 1:5000 Class III, Multiple Cell)
 - *4 swivel mild steel feet with removable rubber base (AMF-F-3/4)
 - *1 IP67 aluminum 4-way junction box
 - *2 eyebolts
 - *Level bubble

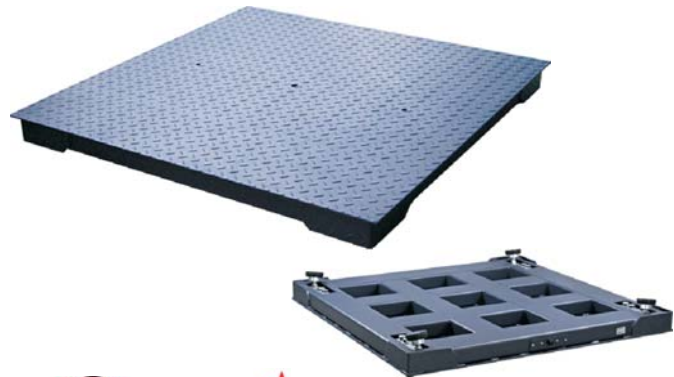

*NTEP Approval for
5Klb: FSP-4X4-HD
10Klb: FSP-4X4-HD

*Measurement Canada Approval for
5Klb: FSP-4X4-HD
10Klb(Pending): FSP-4X4-HD

Part#	FSP4X4-5Klb-HD	FSP4X4-10Klb-HD
Capacity	5000lb	10000lb
Division	1lb	2lb
Platform Size	48in X 48in/ 121.9cm X 121.9cm	48in X 48in/ 121.9cm X 121.9cm
Platform Material	Mild Steel	Mild Steel
Net Weight	419lb / 190kg	419lb / 190kg
Operating Temp.	0 - 40°C / 32 - 104°F	0 - 40°C / 32 - 104°F

*Dimensions and specifications are subject to change without notice.