


Floor Scale, Mild Steel

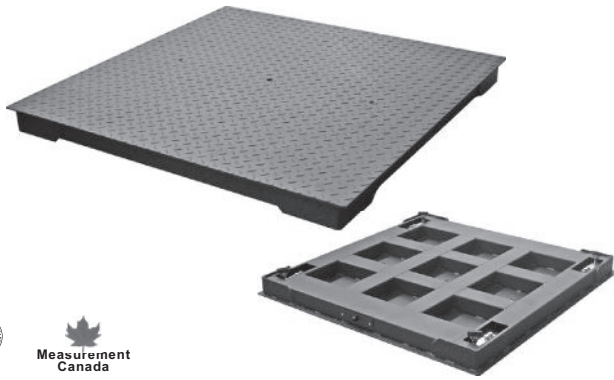


Features:

- Heavy-duty industrial design
- Rigid steel channel frame
- Pre-trimmed corners
- Threaded eyebolt holes for easy lifting
- Powder Coating

Complete Set Includes:

- IP67 alloy steel load cells 563YH-23, OIML MAA & NTEP certified
- 4 swivel mild steel feet AMF-F with removable rubber base
- 2 eyebolts
- 1 IP67 aluminum junction box J04EA-16
- 1 level bubble

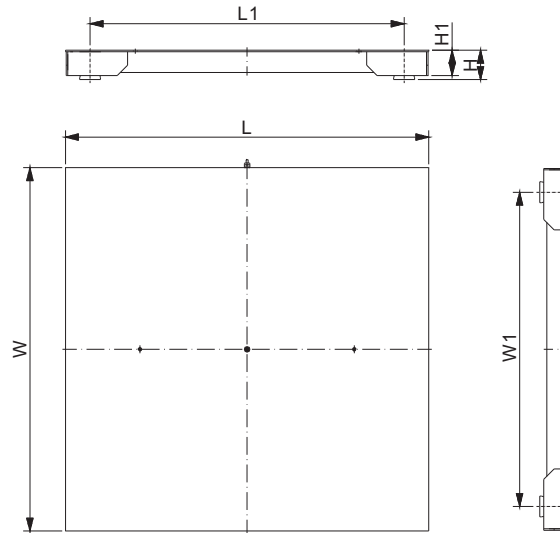

DIMENSIONS


PLATFORM SIZE	H	H1	L	L1	W	W1
mm						
FSP3X3	103-117	85.0	914.0	750.0	914.0	750.0
FSP4X4	104-117	85.0	1219.0	1054.0	1219.0	1054.0
FSP5X5	109-122	86.0	1500.0	1300.0	1500.0	1300.0
FSP5X5-LE	122-128	86.0	1500.0	1300.0	1500.0	1300.0
FSP4X6	109-120	86.0	1219.0	1054.0	1830.0	1665.0
FSP5X7	109-120	86.0	1500.0	1300.0	2134.0	1934.0
FSP4X4-GI	104-117	85.0	1219.0	1054.0	1219.0	1054.0
inches						
FSP3X3	4.06-4.61	3.35	35.98	29.53	35.98	29.53
FSP4X4	4.09-4.61	3.35	47.99	41.50	47.99	41.50
FSP5X5	4.29-4.80	3.39	59.06	51.18	59.06	51.18
FSP5X5-LE	4.80-5.04	3.39	59.06	51.18	59.06	51.18
FSP4X6	4.29-4.72	3.39	47.99	41.50	72.05	65.55
FSP5X7	4.29-4.72	3.39	59.06	51.18	84.02	76.14
FSP4X4-GI	4.09-4.61	3.35	47.99	41.50	47.99	41.50


DIMENSIONS

PART NUMBER	RATED CAPACITY	DIVISION	LOAD CELL CAPACITY	SIZE IN INCHES (W x L x H)	WEIGHT	DECK PLATE THICKNESS
Painted Mild Steel						
FSP3x3-500kg	500kg	0.1kg	563YH-23-300kg	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-1t	1t	0.2kg	563YH-23-500kg	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-2.5t	2.5t	0.5kg	563YH-23-1t	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-1Klb	1Klb	0.2lb	563YH-23-500lb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-2Klb	2Klb	0.5lb	563YH-23-1Klb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-5Klb	5Klb	1lb	563YH-23-2.5Klb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP4x4-500kg	500kg	0.1kg	563YH-23-300kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1t	1t	0.2kg	563YH-23-500kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2.5t	2.5t	0.5kg	563YH-23-1t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5t	5t	1kg	563YH-23-2t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1Klb	1Klb	0.2lb	563YH-23-500lb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2Klb	2Klb	0.5lb	563YH-23-1Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5Klb	5Klb	1lb	563YH-23-2.5Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-10Klb	10Klb	2lb	563YH-23-4Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP5x5-2.5t	2.5t	0.5kg	563YH-23-1t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5t	5t	1kg	563YH-23-2t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5Klb	5Klb	1lb	563YH-23-2.5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-10Klb	10Klb	2lb	563YH-23-SE5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-10Klb-LE	10Klb	2lb	563YH-23-5Klb	59" x 59" x 5"	210kg/463 lb	0.24" / 6mm
FSP4x6-2.5t	2.5t	0.5kg	563YH-23-1t	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-5t	5t	1kg	563YH-23-2t	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-5Klb	5Klb	1lb	563YH-23-2.5Klb	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-10Klb	10Klb	2lb	563YH-23-SE5Klb	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP5x7-2.5t	2.5t	0.5kg	563YH-23-1t	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-5t	5t	1kg	563YH-23-2t	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-5Klb	5Klb	1lb	563YH-23-2.5Klb	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-10Klb	10Klb	2lb	563YH-23-SE5Klb	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
Hot Dip Galvanized Mild Steel						
FSP4x4-5Klb-GI	5Klb	1lb	563YH-23-2.5Klb	48" x 48" x 4"	138kg/304 lb	0.20" / 5mm

OPTIONAL ACCESSORIES

- Indicators (page 184-187)
- Ramps-17 (page 211)
- Bumper Guards (page 212)
- Scale Base Mounting Plate (page 219)

 Measurement Canada Approval for
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb

 NTEP 1:5 000 Class III Approval for
- 3X3-1Klb - 4X4-1Klb - 5X5-1Klb
- 3X3-2Klb - 4X4-2Klb - 5X5-2Klb
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb
- 3X3-10Klb - 4X4-10Klb - 5X5-10Klb