


Description:

The MK4-563YHM4 weigh module kit features four best-selling 563YH true shear beam load cells and weigh modules, including home run cable and junction box. Our rocker pin-loading design provides ideal freedom for proper alignment and thermal expansion. Each weigh module is fully protected from both overload and uplift. This adaptable low-profile kit is ideal for saving installation time with four additional bolt holes in the bottom plate, thus matching the typical tank leg bolt pattern in the floor, for ease of installation. The weigh module kit is ideal for a wide range of weighing applications, including most outdoor tank and vessel weighing needs. Each kit comes with an IP67 water-resistant junction box and 65ft cable.



Load Cell Certifications:

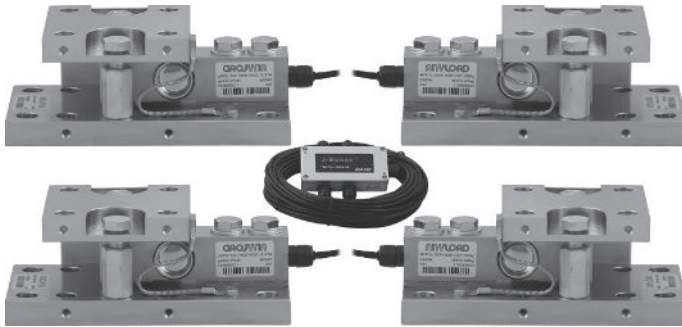

Complete Set Includes:

- (4 pcs) Four 563YH Alloy Steel single-ended true shear beam load cells
- (4 pcs) Four 563YHM4 Alloy Steel weigh modules
- (1 pcs) One J04SA-16 water-resistant junction box with GORE Breather Vent
- (1 roll) 65ft (20m) cable, 4-wire PVC cable with both copper braid & foil shielding (CB4-5.1-20m)

Features:

- NTEP certified true shear beam load cells (from 250lb-20Klb & 200kg-5t)
- OIML certified true shear beam load cells (from 1Klb-20Klb & 500kg-10t)
- CE, RoHS, and ExNepsi certified load cells
- Uplift protection
- Allowance for thermal expansion
- Top plate mounts directly to vessel / tank leg
- Conventional wiring and color code

| PART NUMBER | | |
|--------------------|---------------------------|------------------------|
| Load Cell Capacity | Part No. | Weight Approx. (kg/lb) |
| 100lb..... | MK4-563YHM4-100lb-S..... | 22.0/48.5 |
| 250lb..... | MK4-563YHM4-250lb-S..... | 22.0/48.5 |
| 500lb..... | MK4-563YHM4-500lb-S..... | 22.0/48.5 |
| 1Klb..... | MK4-563YHM4-1Klb-S..... | 22.0/48.5 |
| 2Klb..... | MK4-563YHM4-2Klb-S..... | 22.0/48.5 |
| 2.5Klb..... | MK4-563YHM4-2.5Klb-S..... | 22.0/48.5 |
| 4Klb..... | MK4-563YHM4-4Klb-S..... | 22.0/48.5 |
| SE5Klb..... | MK4-563YHM4-SE5Klb-S..... | 22.0/48.5 |
| 5Klb..... | MK4-563YHM4-5Klb-S..... | 25.0/55.1 |
| 10Klb..... | MK4-563YHM4-10Klb-S..... | 25.0/55.1 |

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.